


Expand Storage on Blade Servers

ASSIGN INDIVIDUAL SSD/HDDs TO SPACE LIMITED SERVERS

SCALE BLADE SERVER STORAGE

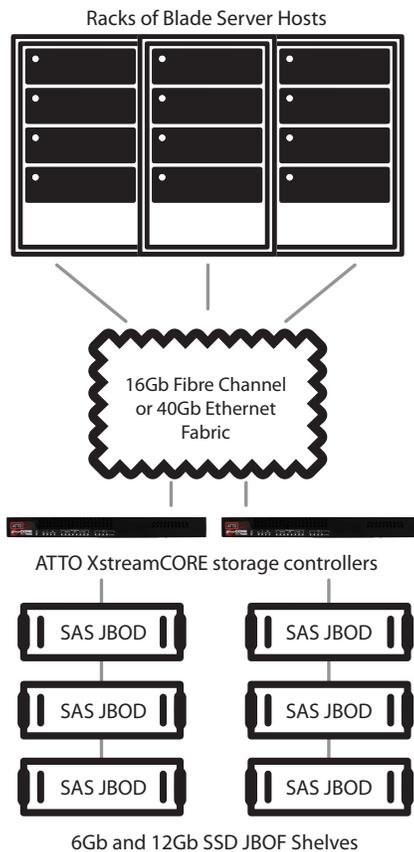

With XstreamCORE connected to SAS JBOD storage arrays, admins and storage owners can assign individual drives to each blade server allowing for more capacity and access to flash SSDs. A total of 960 drives can each be mapped to up to 64 individual blade servers.

BLADE SERVER STORAGE CONSTRAINTS

Blade servers provide dense compute power in a small footprint but typically have limited space for on-board SSDs or HDD typically only having one or two drives. Options to expand usually include Enterprise storage and All Flash Arrays which offer features, services and licensing costs that are beyond typical budgets.

With the lack of PCIe slots, blade servers use mezzanine form-factor cards for connectivity so there are limited options for adding Fibre Channel, Ethernet or SAS. Since blade servers need to communicate with the greater network, Ethernet is included on each blade chassis allowing for network connectivity.

ATTO XSTREAMCORE® ADDS INDIVIDUAL DRIVES TO BLADE SERVERS

ATTO XstreamCORE® allows storage owners or IT Administrators to assign any number of drives from commodity JBOD storage to up to 64 individual blade nodes so up to 960 total SAS/SATA SSDs or HDDs will be available to these servers over Ethernet or Fibre Channel. These drives can be totally isolated from any other node and remapped to a new node in the event of node failure.

ATTO XSTREAMCORE ADVANTAGES

- XstreamCORE ET 8200 is a solid state 1U rackmount controller that was designed as an accelerated protocol converter that connects up to 960 SAS/SATA SSDs or HDDs via JBOD enclosures to Ethernet fabrics while the 7500 and 7550 models add this storage to Fibre Channel fabrics
- XstreamCORE features ATTO xCORE processor which accelerates all I/O in hardware ensuring a deterministic, consistent protocol conversion latency of less than 2 microseconds
- ATTO eCORE processor technology was developed to offload storage services and features from the I/O path to maintain consistent performance and latencies
- Total performance of up to 1.2M 4K IOPS & 6.4GB/s throughput per controller
- Allows the use of commodity JBODs to scale up to 960 total SSD/HDD devices
- SSDs and HDDs presented individually as Fibre Channel or iSCSI LUNs, no need to invest in high cost solutions like RAID Arrays, Enterprise storage or All Flash Arrays when the extra licensing or added software features are not required

ATTO Accelerated Protocol Conversion Appliance

Product	4K IOPS	Throughput	Host Ports	x4 SAS Ports	SKU
XstreamCORE ET 8200	1.2M	6,400 MB/s	(2) - 40Gb Ethernet	4 (16 PHYs)	XCET-8200-002
XstreamCORE FC 7550	1.2M	6,400 MB/s	(4) - 16Gb Fibre Channel	4 (16 PHYs)	XCFC-7550-004