

The ATTO ExpressSAS RAID adapters are compatible with Serial ATA (SATA) and Serial Attached SCSI (SAS) devices and provide enhanced reliability, scalability and flexibility for high performance storage applications. The ExpressSAS family incorporates next generation Mini-SAS technology to connect to SAS, SATA I and SATA II devices alike. ATTO offers a variety of Mini-SAS cabling options for its ExpressSAS R348 and R380 models. For more information on connectivity, contact your authorized ATTO representative.


Internal



ATTO P/N: CBL-8087-INT
HOST CONNECTOR: SFF-8087 to
TARGET CONNECTOR: SFF-8087
LENGTH: 0.5 meter
FOR USE WITH: R348




ATTO P/N: CBL-8484-INT
HOST CONNECTOR: SFF-8087 to
TARGET CONNECTOR: SFF-8484
LENGTH: 0.5 meter
FOR USE WITH: R348

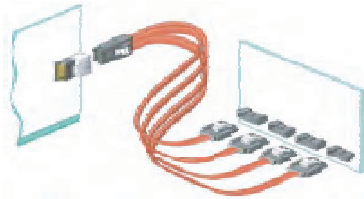


ATTO P/N: CBL-SATA-INT
HOST CONNECTOR: SFF-8087 to
TARGET CONNECTOR: (4) x1 SATA drives
LENGTH: 0.5 meter
FOR USE WITH: R348

External*

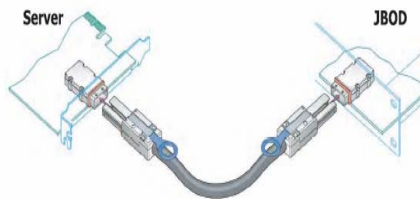

ATTO P/N (3m): CBL-8088-EX3
ATTO P/N (1m): CBL-8088-EX1*
HOST CONNECTOR: SFF-8088 to
TARGET CONNECTOR: SFF-8088
LENGTH: 3.0 meter / 1.0 meter
FOR USE WITH: R348 or R380

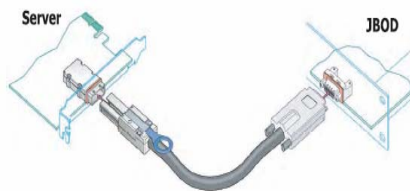

ATTO P/N (3m): CBL-8470-EX3
ATTO P/N (1m): CBL-8470-EX1*
HOST CONNECTOR: SFF-8088 to
TARGET CONNECTOR: SFF-8470 (Infiniband)
LENGTH: 3.0 meter / 1.0 meter
FOR USE WITH: R348 or R380

* For best results, a cable length of 1 meter or less is recommended for external SATA JBOD connectivity

ExpressSAS