



ATTO Technology, Inc.
ATTO™ FibreBridge™ 1190E

Installation and Operation Manual

© 2001 ATTO Technology, Inc. All rights reserved. All brand or product names are trademarks of their respective holders. No part of this manual may be reproduced in any form or by any means without the express written permission of ATTO Technology, Inc.

Table of Contents

Chapter 1	
Fibre Channel is a key technology for storage	1
Chapter 2	
ATTO FibreBridge supports diverse SAN needs	3
Chapter 3	
ATTO FibreBridge 1190E characteristics	5
Chapter 4	
How to connect SCSI devices to SCSI ports	7
Chapter 5	
How to connect the Fibre Channel port	8
Chapter 6	
ATTO FibreBridge addressing	9
Chapter 7	
How to access ATTO FibreBridge Services	11
Chapter 7.1	
Command Line Interface use and guidance	13
Chapter 7.1.1	
General use commands	15
FibreBridgeName	
Info	
Help	
Reserve	
RestoreConfiguration	
SaveConfiguration	
VerboseMode	
Chapter 7.1.2	
Mapping commands	16
AutoMap	
DispFcPortDB	
FcHard	
FcHardAddress	
FibreBridgeTargetLUN	
RouteChange	
RouteDisplay	
RouteOffline	
RouteOnline	

Chapter 7.1.3
Diagnostic commands19

- ClearEvent
- DispEvent
- DisplayEvent
- EccLog
- ErrorLog
- IdentifyFibreBridge
- LogEvent
- ParityLog
- Performance

Chapter 7.1.4
SCSI configuration commands21

- ScsiInitID
- ScsiPortBusSpeed
- ScsiPortList
- ScsiPortResetOnStartup
- ScsiPortSelTimeout
- ScsiPortSyncTransfer
- ScsiPortTaggedQueuing
- ScsiPortUltra2
- ScsiPortWideTransfer
- ScsiTargets
- ScsiTermination

Chapter 7.1.5
Fibre Channel configuration commands23

- FcAck0
- FcClass2
- FcConnMode
- FcFairArb
- FcFrameLength
- FcFullDuplex
- FcInitiator
- FcPortList
- FcSCSIBusyStatus
- FcTargets
- FcWWName
- FibreBridgeTargetLUN

Chapter 7.1.6
Serial Port configuration commands25

- SerialPortBaudRate
- SerialPortEcho
- SerialPortHandshake
- SerialPortStopBits

Chapter 7.1.7
Ethernet configuration commands26

- EthernetSpeed
- IPAddress
- IPDHCP
- IPGateway
- IPSubnetMask

Chapter 7.1.8
Maintenance commands27
 FibreBridgeModel
 FirmwareRestart
 SerialNumber
 MaxEnclTempAlrm
 MinEnclTempAlrm
 ScsiPortReset
 Temperature
 Zmodem

Chapter 7.2
In-band CLI using SCSI over Fibre Channel port29

Chapter 8
Serverless backup support31

Chapter 9
Updating firmware33

Index
Command Line Interface commands..... i

Appendix A
Examples of command usage iii

Appendix B
Standards and compliancesvii

Appendix C
Fibre Channel Accessories ix

Appendix D
How to Contact ATTO Technology, Inc. xi

1 Fibre Channel is a key technology for storage

Fibre Channel is a serial communications technology designed to transfer large amounts of data between a variety of hardware systems over long distances. It is a key technology for applications that require shared, high bandwidth access to storage.

Fibre Channel provides a logical point-to-point serial channel for the transfer of data between a buffer at a source device and a buffer at a destination device. It moves buffer contents from one port to another, without regard to the format or meaning of the data, so different upper-level protocols are able to run over Fibre Channel hardware.

The Fibre Channel architecture is structured as a hierarchical set of protocol layers. Defined within these layers are rules for signal interfaces, serial encoding and decoding, error control, frame format and communications protocols.

All ATTO™ FibreBridge™ models can be used in a SAN (Storage Area Network) to connect a variety of Fibre Channel and SCSI devices to meet your needs.

A SAN is a shared storage architecture connecting computers and storage devices for online data access. Each connected system can directly access any attached storage device. Storage devices could include RAID, tape backup, tape library, CD-ROM library or JBOD.

SANs maintain greater fault tolerance and load balancing by supporting server clustering and failover (the ability for one server to take over for another in the event of a failure).

ATTO FibreBridge models provide the interface between SCSI and Fibre Channel resources in SANs. Possible configurations depend upon your current hardware and what you need to do.

Glossary

Some terms used in the Fibre Channel industry are defined below. More information is available through the Fibre Channel Industry Association (www.fibrechannel.com), the Storage Area Networking Industry Association (www.snia.org) and the Fibre Channel Consortium (www.iol.unh.edu).

Term	Definition
fabric	A Fibre Channel switch or two or more Fibre Channel switches interconnected to physically transmit data between any two N_Ports on a switch or switches.
failover	The substitution of a working system for one which has failed.
FC-AL	Fibre Channel Arbitrated Loop: A Fibre Channel network in which up to 126 systems and devices are connected in a loop topology, with each transmitter connecting to the receiver of the device to its logical right. The Fibre Channel Arbitrated Loop protocol used for transmission is different from Fibre Channel switched and point-to-point protocols. Multiple FC-AL loops can be connected via a fabric switch to extend the network.
firmware	Software stored in read-only memory (ROM) or programmable ROM (PROM). Firmware is often responsible for the behavior of a system when it is first switched on.

Term	Definition
F_port	A port in the Fibre Channel fabric where a N_port may attach
FL-port	A port in the Fibre Channel fabric where a NL_port may attach in an arbitrated loop
hot swapping	Components are removed and replaced while the unit is running, with power to either the component or a device connected to the unit. Not all components are hot swappable: please read installation and maintenance instructions carefully.
initiator device	A component which originates a command
JBOD	Just a Bunch Of Disks: a storage subsystem using multiple independent disk drives with or without RAID configuration.
LED	Light-emitting diode, a type of diode that emits light when current passes through it. Visible LEDs are used as indicator lights on all sorts of electronic devices.
LUN	Logical Unit Number: a SCSI or Fibre Channel identifier of a device
NL port	a port attached to a node in Fibre Channel arbitrated loop or fabric loop configurations
N_port	a port attached to a node used with point to point or fabric configurations
RAID	Originally Redundant Array of Inexpensive Disks, now Redundant Array of Independent Drives: a storage system spanning multiple disk drives. The following standard RAID specifications will be used here: RAID 0: disk striping in which fixed-length sequences of data are mapped to member disks in a regular rotating pattern. RAID 1: Mirrored arrays: information written to one disk is also written to another simultaneously. Also known as disk shadowing, real-time copy, and t1 copy. RAID 10: Striped array with mirroring
SCSI	Small Computer Systems Interface: a processor-independent standard for system-level interface between a computer and intelligent devices including hard disks, floppy disks, CD-ROM, printers, scanners, etc.
topology	logical layout of the parts of a computer system or network and their interconnections

2 ATTO FibreBridge supports diverse SAN needs

The ATTO FibreBridge™ family of products provides a Fibre Channel-to-SCSI bridge available as a embedded board, a stand alone enclosure that can be fitted for rackmount integration, or a desktop unit, depending on the model and your needs.

The ATTO FibreBridge family of products share common configuration options and functions to provide the most versatile connectivity options available. Each product has been engineered to address specific customer needs. New capabilities are integrated into products throughout the FibreBridge family as much as possible, requiring only an upgrade of firmware to incorporate them into your SAN (see Chapter 9). To make sure you

have the most up-to-date version of the firmware, visit the ATTO Technology website, www.attotech.com.

All ATTO FibreBridge models include full duplex mode, Class 2 transfers, Intermix transfers and direct fabric connect capabilities.

Please refer to the Technical Specifications for complete information about your FibreBridge model.

Quick start instructions for the FibreBridge 1190E

The ATTO FibreBridge 1190E offers a variety of ways to connect into a SAN. The following is a quick start description:

- 1 Place the FibreBridge 1190E where you want it. (See Chapter 3)**
- 2 Connect the SCSI devices to the FibreBridge. (See Chapter 4)**
- 3 Connect the FibreBridge to your SAN: attach short wave optical cables into the Fibre Channel port on the FibreBridge. (See Chapter 5)**
- 4 Connect to the management (services) port via the RS-232 serial port or Ethernet. (See Chapter 7)**
- 5 Map your devices to the appropriate FibreBridge Fibre Channel port. (See Chapter 6 and Chapter 7.1.2)**
- 6 Boot the computers on the SAN and configure the devices connected to the FibreBridge.**

Exhibit 2-1 The following chart provides an overview of the features and capabilities for the newest FibreBridge models. Contact your authorized ATTO representative or visit ATTO Technology's website, www.attotech.com, for additional information.

ATTO FibreBridge™ feature availability matrix

	1180E	1190E	2200R/D	3200R	4500C/R/D
FC Ports	1	1	1	1	3
FC port number (fp)	0	0	0	0	0, 1, 2
FC interface	DB9/SC	DB9/SC	GBIC	GBIC	SC
Data transfer	1 Gigabit	1 Gigabit	1 Gigabit	1 Gigabit	1 Gigabit
SCSI ports	1	2	2	2	4
SCSI bus number (sb)	0	0, 1	0, 1	0, 1	0, 1, 2, 3
Maximum data transfer rate	80 MB/sec.	100 MB/sec.	100 MB/sec.	100 MB/sec.	300 MB/sec.
Configuration	Board (embedded)	Board (embedded)	Rackmount/ Desktop	Rackmount	Board/Desktop/ Rackmount
Error checking & correction memory	Yes	Yes	No	No	Yes
Serial port management interface	Yes	Yes	Yes	Yes	Yes
Management via Telnet/FTP	No	Yes	Yes	Yes	Yes
In-band SCSI management interface	Yes	Yes	Yes	Yes	Yes
Menu interface	No	No	Yes	Yes	Yes
BridgeTools management interface	No	No	Yes	Yes	Yes
In-band CLI	Yes	Yes	Yes	Yes	Yes
Serverless backup	Yes	Yes	Yes	Yes	Yes

3 ATTO FibreBridge 1190E characteristics

The ATTO FibreBridge™ 1190E is a 1 x 2 (one Fibre Channel port with two SCSI ports) Fibre Channel to SCSI bridge for high throughput enterprise environments designed for mission-critical applications.

The FibreBridge 1190E features a small form factor for standard embedded applications such as tape drives, hard disk drives and other SCSI devices and includes serverless backup support and support for manual and auto LUN mapping

Dimensions

- 4.2 inches wide
- 7.6 inches long

Cooling

Environmental requirements

- 0-40°C
- Ambient air should not exceed 70°C.
- 10-90% humidity non-condensing

Power

Power (+5 V and +12V) is supplied to the FibreBridge 1190E through a standard PCI connector or a 4-pin connector, the default: Amp Part no: 641737-1. The 1190E is designed to have ±5% tolerance to the power supply. A switching regulator generates 3.3V from either 5V or 2V, requiring 0.75A at 12V. Jumper-enabled power from a PCI connector is also possible.

Fibre Channel port

The Fibre Channel port can connect the FibreBridge to either a Fabric or Arbitrated Loop.


- 1.0625 gigahertz (100 MB/sec.)
- Class 2, Class 3 and Intermix ANSI Fibre Channel specifications support
- PLDA, Public Loop Login (NL_port) and Fabric Direct Connect (N_port) support
- Full Duplex transmission support
- MIA compliant DB-9 or Short Wave fiber optic SE connector

SCSI ports

The two SCSI ports on the FibreBridge 1190E connect storage devices into the Fibre Channel Storage Area Network (SAN). Each port is totally independent from the others.

The FibreBridge 1190E SCSI port is an Ultra 2 (LVD) SCSI with 80 MB/sec. maximum per bus, downward compatible with all forms of single-ended SCSI.

Exhibit 3-1 Graphical representation of the FibreBridge 1190E with ShortWave fiber optic SE connector (top) or MIA compliant DB-9 connector (bottom).

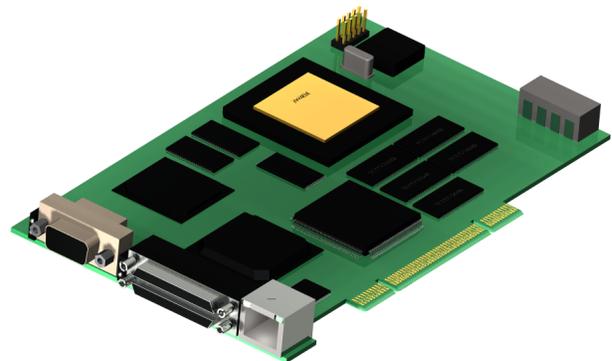

Ethernet port

The 10/100 Base T Ethernet port supports SNMP- and Telnet-based monitoring and management through a command line interface or menu system.

Serial port

The RS-232 serial port provides support for remote monitoring and management through a command line interface or menu system.

Serial/Ethernet RJ45 port

The RJ45 port may be used for either serial or Ethernet connections depending on the jumper settings and cable. The factory sets the jumpers in a serial configuration across the top and middle rows of the selector header.

To enable an Ethernet configuration, move all the jumpers in the selector header to the middle and bottom rows.

If using the RJ45 in a serial configuration, create a serial cable with the following pin outs:

Signal Name	RJ45 Pin
TX	1
RX	2
Ground	6

LED indicators


→ FC Activity: LED blinks to show activity on the Fibre Channel port

(numbered 0). During very high activity, the LED appears to be steadily lit.

→ SCSI Activity: shows activity on the SCSI bus (numbered 0).

→ Ready: should light after power has been applied; indicates the board has completed the initialization process without any failures and is ready to handle data transfers.

Exhibit 3-2 FibreBridge 1190E board layout.

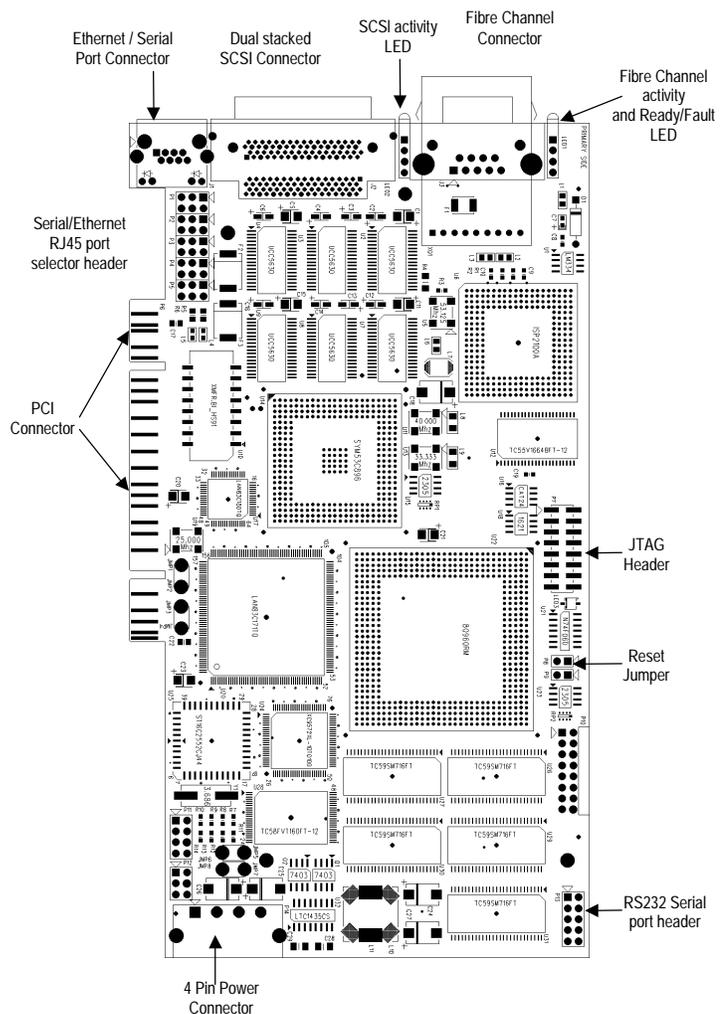

4 How to connect SCSI devices to SCSI ports

ATTO FibreBridge™ SCSI ports are used to connect SCSI storage devices into the Fibre Channel Storage Area Network (SAN).

A FibreBridge may have the following types of SCSI ports:

- Ultra 2 (LVD) SCSI– 80 MB/sec. max per bus
- Single Ended Ultra SCSI – 40 MB/sec. max per bus

A FibreBridge with an LVD SCSI personality module is downward compatible with Single Ended Ultra SCSI as well as Fast, Wide, or Narrow SCSI devices.

Each SCSI port is totally independent from the any other SCSI port. This means that each bus is capable of supporting 15 devices and each bus is capable of 40 or 80 MB/sec. (Ultra or Ultra2).

However, you may use externally provided software striping to create a RAID 0 group that includes devices from both SCSI busses to increase overall performance.

Another advantage of independent SCSI ports is that each SCSI bus auto-negotiates the appropriate sync rates with the connected devices. If slower devices are mixed with faster Ultra2 devices, the bus will communicate at the rate of the slowest device, thus wasting the performance capabilities of the faster devices. You should connect slower devices to one SCSI port and connect faster devices on the other port on your FibreBridge.

The FibreBridge supports a wide variety of SCSI storage devices including stand-alone drives, removable drives, JBODs, RAIDs, tape, CD and DVD drives, changers, libraries and magneto optical drives.

To connect SCSI devices to the ATTO FibreBridge:

- 1 Connect a VHDCI SCSI connector from the SCSI device to a port on the FibreBridge 1190.**

Check the type of cable, cable length limit and number of devices recommended for each port. It is important to keep cable lengths as short as possible to ensure the highest signal quality and performance. These cable lengths include the wiring inside the devices.

Device type	Number of devices	Cable limit
Ultra SCSI Single Ended (SE)	less than 4	3 meters
Ultra SCSI Single Ended (SE)	4 or more	1.5 meters
UltraSCSI High Voltage Differential (HVD)	15	25 meters
Ultra2 SCSI Low Voltage Differential (LVD)	15	12 meters

- 2 Set the IDs of the SCSI devices connected to the bridge to a value other than 7. It is recommended to use a sequential ID starting at 0 for each device. Each SCSI port in the ATTO FibreBridge has an internal factory setting ID of 7, typical for a SCSI initiator device.**


NOTE The entire SCSI bus will operate at the speed of the slowest device. If you wish to mix devices of different SCSI speeds on the bridge, it is best to place them on separate busses. That is, put the slower devices on bridge SCSI bus 0, and the faster devices on bridge SCSI bus 1. Each bus is independent so each can operate at different speeds.

- 3 Terminate each SCSI bus after the last device. The bridge is terminated internally.**

5 How to connect the Fibre Channel port

The Fibre Channel port(s) on the ATTO FibreBridge™ connect the bridge into either a Fabric or Arbitrated Loop.

Fibre Channel technology offers a variety of cabling options including standard copper, equalized copper, multimode fiber optic, and single mode fiber optic.



The FibreBridge 1190E uses an MIA compliant DB-9 or

Short Wave fiber optic SE connector.

The type of cable to use varies depending upon the application, environment and distance. The following tables illustrate the different cable options available.

Make sure all cables are anchored securely at both ends with the proper connectors.

Cable length	Cable type	Cable size	Connector
<15 meters	unequalized copper		DB-9
≥ 15 meters ≤ 30 meters	equalized copper		DB-9
Up to 175 meters	multi mode fiber optic	62.5 micron	SC optic connector
Up to 500 meters	multi mode fiber optic	50 micron	SC optic connector

Initial configuration

The FibreBridge can be configured to support connectivity to arbitrated loop or fabric topologies. (See Chapter 6 of this manual.)


When connecting these bridges to an F-Port device, set the Port Connection Mode to “Point-to-Point.”

- When connecting to a FL-port device, set the Port Connector Mode to “Loop” mode.
- The FibreBridge uses public loop login to log into a FL-Port on a fabric switch.
- The FibreBridge Port Connection Mode can be set using the RS-232, Ethernet, or in-band communication links.

6 ATTO FibreBridge addressing

The ATTO FibreBridge™ allows parallel SCSI devices to participate in a Fibre Channel arbitrated loop or on a fabric. Fibre Channel and parallel SCSI use different models to address devices. The FibreBridge translates between these addressing models.

The chart below is a simplified overview of data and control flow between the application and the SCSI device through a number of stages.

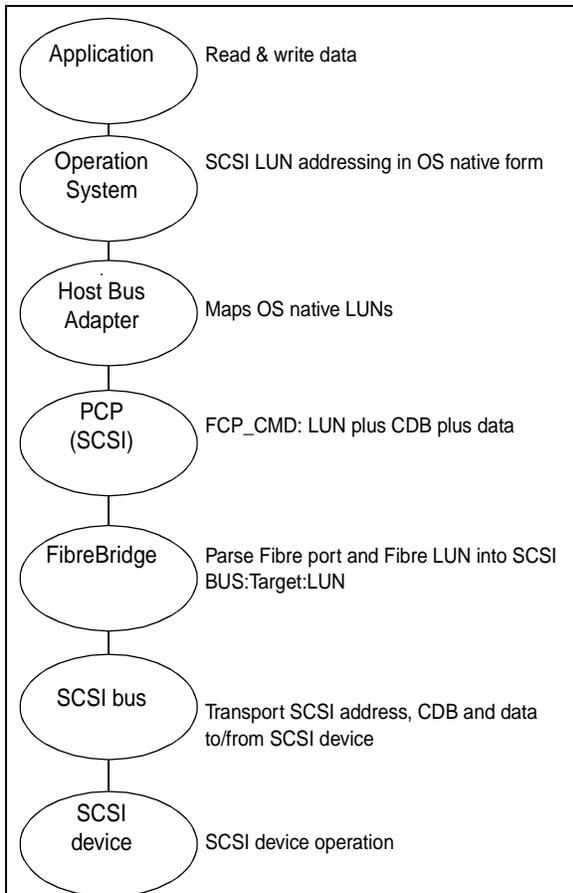

Fibre Channel World Wide Name (WWN)

Each Fibre Channel device is assigned a unique World Wide Name (WWN). The WWN is used to identify all Fibre Channel devices. The 64-bit WWN has the following format:

Field Name	WWN Format		Company ID			Device ID		
	0	1	2	3	4	5	6	7
Byte	0	1	2	3	4	5	6	7
Value	20	00	00	10	86	xx	xx	x x

The Institute of Electrical and Electronics Engineers (IEEE) assigns each manufacturer a unique Company ID. The Device ID field contains a unique value assigned by ATTO Technology to every Fibre Channel product produced by ATTO Technology.

Arbitrated Loop Port Address (AL_PA)

On a Fibre Channel Arbitrated Loop, the FibreBridge appears at a single Arbitrated Loop Port Address (AL_PA). Each device on an arbitrated loop is assigned a unique AL_PA during loop initialization. The FibreBridge supports both modes of AL_PA assignment, commonly referred to as *hard* and *soft* addressing.

Soft addressing allows the loop initialization master to assign the FibreBridge a unique AL_PA during the loop initialization process. The AL_PA assigned cannot be determined before loop initialization. For example, adding new devices to an arbitrated loop may change the AL_PA assigned to the FibreBridge.

Hard addressing allows a predetermined AL_PA to be assigned to the FibreBridge. The FibreBridge will try to acquire the desired hard AL_PA. If another device has already been assigned the specified AL_PA, the FibreBridge will acquire a currently unassigned AL_PA.

ATTO BridgeTools software allows you to select either hard or soft addressing modes. The default mode is soft addressing.

Addressing Devices Connected to the FibreBridge

SCSI devices connected to the FibreBridge also show up as Fibre Channel LUNs to the host computer. SCSI devices must be on the same addressing level as the SCSI portion of the

FibreBridge. The FibreBridge SCSI ports must be set to different SCSI IDs than the devices on the bus.

SCSI devices are mapped manually to desired Fibre Channel port and Fibre Channel LUNs. Manual mapping allows you to maximize the efficiency and performance of your SCSI devices while allowing great flexibility.

Manual SCSI Device Mapping

The FibreBridge can be commanded to find all the SCSI devices on its SCSI bus. With this information you then decide where you want to place these devices on the Fibre Channel ports.

In the chart at right, the SCSI device on SCSI bus 0 at SCSI address of ID 0 LUN 0 is being mapped to Fibre Port 0 (on the FibreBridge) at Fibre Channel LUN 4.

You may map SCSI devices manually by using the Command Line Interface RouteXXX family of commands. See Chapter 7.1.2 for more details.

Fibre Port	FC LUN	SCSI BUS	SCSI ID	SCSI LUN
0	4	0	0	0
0	0	0	1	0
0	2	0	13	0
0	0	0	15	0
0	3	0	1	0
0	10	0	1	1
0	30	0	8	5
0	23	0	8	7

Note: two SCSI devices cannot be mapped to the same Fibre Port and Fibre Channel LUN. Also, if the same SCSI device is mapped to two different Fibre Port and/or Fibre Channel LUN, these Fibre Port and Fibre Channel LUNs will be taken offline automatically until the conflict is resolved.

7 How to access ATTO FibreBridge Services

Communicate with the ATTO FibreBridge™ through an in-band Fibre Channel link using in-band SCSI commands, the RS-232 port or the Ethernet (Telnet/FTP) port using Command Line Interface.

ATTO FibreBridge Services can be used to configure and tune the bridge for many different environments and applications, update the firmware, configure the addresses of the connected SCSI devices, monitor internal power and temperature status, report on hardware diagnostics and log failures.

Three avenues are available:

- In-band SCSI over Fibre Channel
- RS-232 port
- Telnet or FTP over Ethernet

The next chapters of this manual provide details on using the Command Line Interface to access FibreBridge Services.

CAUTION Any changes must be saved and will not take effect until the ATTO FibreBridge is restarted.

Access the ATTO FibreBridge through in-band SCSI over Fibre Channel

In-band SCSI commands (Write Buffer and Read Buffer) may be issued to the FibreBridge to manage configuration via two mechanisms:

- In-band CLI over SCSI, where ASCII CLI (services) commands, may be issued via Write Buffer. All CLI commands are supported. Refer to Chapter 7.2.

- Buffer ID/value, where the application program uses a SCSI CDB (command descriptor block) to select the buffer ID of the configuration parameters to be affected, and the new value of the parameter. Most FibreBridge configuration options are available.

Access the ATTO FibreBridge over the RS-232 port

The ATTO FibreBridge supports remote service operations over the RS-232 serial port using standard terminal emulation software available with most systems.

- 1 **Connect a DB-9 crossover serial cable (null modem) between the ATTO FibreBridge serial port and one of the computer's serial COM ports. A gender changer or DB-9 to DB-25 converter may be needed depending on the cables being used.**

- 2 **Enable the computer's serial port and initiate a terminal emulation link.**
- 3 **Set the following serial parameters in your terminal program: Bits per second: 9600, Data Bits: 8, Parity: None, Stop Bits: 1, Flow Control: None. Use ASCII as the terminal type. Echo should be on.**
- 4 **You may use the command line interface (CLI) as explained in the following chapters.**

Configure the ATTO FibreBridge for a network over the Ethernet port

The 10/100 BaseT Ethernet port provides Telnet-based monitoring and management. The default IP address is 10.0.0.1; the default subnet mask is 255.255.255.0. You don't need to do anything more if you want to use the default, but these parameters can be changed using the RS-232 port or Telnet. The ATTO FibreBridge should first be configured for the network using the RS-232 port to establish the correct IP address.

To access the ATTO FibreBridge via Ethernet:

- 1 **Connect an Ethernet cable between the FibreBridge and a 10/100Base-T connection. You may need a crossover cable connecting directly to a computer. The ATTO FibreBridge will auto detect the Ethernet speed.**
- 2 **Access using any standard Telnet program.**

To connect via Telnet:

- 1 Supply the IP address to the Telnet program. The local echo should be set to *on* if the Telnet software supports it. Use Vt100 for communication.
- 2 Verify that the bridge can be accessed on the local Ethernet by using the Ping utility. On most systems, type `ping <IP Address>`. If the product module does not respond, it may not be connected correctly to the network, or is somehow unreachable by the

computer from which it is being pinged. Check network connections and security as well as the ATTO FibreBridge.

To set up and configure FTP:

- 1 Ensure that the FTP program is in binary mode. Access the ATTO FibreBridge at the IP address that was previously set (or the default).
- 2 Log into the ATTO FibreBridge. The username the bridge will accept is *sysadmin*. Enter *userid* as the password.
- 3 Use the command line interface (CLI) as explained in the following chapters.

7.1 Command Line Interface use and guidance

Configuration of the ATTO FibreBridge™, also known as FibreBridge Services, is available via the Command Line Interface (CLI).

FibreBridge Services includes displaying and modifying various attributes of FibreBridge operation, as well as the update of firmware using the command line interface (CLI).

The Command Line Interface provides access to FibreBridge Services through ASCII command lines. CLI is designed to be used by applications and “power users.” The initial display, after powering up the unit or restarting the firmware, will contain the information in Exhibit 7.1-3. Once the initial display is complete, with the word *Ready*, you are in the Command Line Interface mode.

Type *Help* to display a list of all commands available.

- CLI commands are context sensitive and generally follow a standard format:

[Get | Set] Command [Parameter 1 | Parameter 2]
followed by the *return* or *enter* key

- CLI commands are case insensitive: you may type all upper or all lower case or a mixture. Upper and lower case in this manual and the *help* screen are for clarification only.
- Commands generally have three types of operation: get, set and immediate. They are summarized here and in Exhibit 7.1-1
- The **get** form returns the value of a parameter or setting and is an informational command.

- Responses to get commands are specified in the **Results** field for each command, followed by *Ready*.
- The **set** form is an action that changes the value of a parameter or configuration setting. It may require a **SaveConfiguration** command and a restart of the system before it is implemented. The restart can be accomplished as part of the **SaveConfiguration** command or by using a separate **FirmwareRestart** command.
- A number of set commands may be issued before the **SaveConfiguration** command.
- Responses to **set** commands are either an error message or *Ready*. *. The asterisk indicates you must use a **SaveConfiguration** command to finalize the **set** command.
- **SaveConfiguration** will ask whether you want to restart the system or not.
- Set commands which do not require a **SaveConfiguration** command, defined as immediate commands, are immediately executed.
- Responses to Immediate commands are either an error message or data results followed by *Ready*. Symbols, typefaces and abbreviations used to indicate functions and elements of the command line interface used in this manual include those found in Exhibit 7.1-2.

Exhibit 7.1-1 Summary of command functions.

Set commands configure the FibreBridge and display what you have changed after completing the task. Commands which require a **SaveConfiguration** command to complete their implementation will return *Ready*. *. Set commands which do not require a **SaveConfiguration** command are immediately executed.

Get commands display information about the configuration of the FibreBridge. Responses to get commands are specified in the Results field for each command, followed by *Ready*.

Screen messages, also called **returns**, may be either **terse**, with just the current information, or **verbose**, with labels and the current information. If you want the verbose mode, type **set VerboseMode enabled**.

Exhibit 7.1-2 Command conventions.

Symbol	Indicates
[]	Required entry
< >	Optional entry
	pick one of
...	Ellipses, repetition of preceding item
\n	end of line
-	a range (6 – 9 = 6, 7, 8, 9)
Boldface words	must be typed as they appear
<i>Italicized words</i>	Arguments which must be replaced by whatever they represent
fl	Fibre Channel lun number (0 <= fl <= 31)
fp	Fibre Channel port number (0 <= fp <= 2)
sb	SCSI bus number (0<= sb <= 2)
sl	SCSI lun ID (0 <= sl <= 7)
st	SCSI target ID (0 <= st <= 15)

Exhibit 7.1-3 POST information

```

ATTO FibreBridge 1190
(c) 2001 ATTO Technology, Incorporated.
Firmware version 003B release date Apr 30 2001, 09:47:09 Build 003B
Power-On Self-Test Completion Status: GOOD
64 Megabytes of RAM Installed.
1 1.0624 Gb/s Fibre Channel Interfaces.
2 LVD SCSI Interface Ports.
Interface 0 World Wide Name = 20 00 00 10 86 10 00 00
FibreBridge Serial Number = "FB1190L000000"
FibreBridge Name = "          "
ErrorLog Contents: NO ERRORS
For help, type HELP.

Ready.

```

7.1.1 General use commands

The CLI commands outlined in this chapter get information or perform functions which are used in a variety of situations with the FibreBridge.

CLI commands are case insensitive (upper and lower case allowed anywhere).

Commands generally follow a standard format:
[Get | Set] Command [Parameter 1 | Parameter 2]
followed by the return or enter key.

FibreBridgeName

Specifies the eight-character name assigned to the FibreBridge used to identify individual FibreBridge units. It is not the World Wide Name (WWN).

Actions: **set FibreBridge Name [value]**

Information: **get FibreBridgeName**

SaveConfiguration

Info

Displays version numbers and other production information for key components within the FibreBridge

Action: **none**

Information: **Info**

Help

Displays a list of available commands. If command name is specified, displays detailed command-specific information.

Action: **none**

Information: **Help [command name]**

Reserve

Reservation of the FibreBridge is implicit: once the configuration image is changed by any user of services, the FibreBridge becomes RESERVED. Executing a SaveConfiguration, RestoreConfiguration or FcRestart RELEASES the FibreBridge so that other services users may access it.

Limits: When FibreBridge services interface is RESERVED, set commands from other users are unavailable.

At least one interface must always have access to the FibreBridge.

Action: **Reserve**

Information: **none**

Return: [enabled | disabled]

RestoreConfiguration

Restores configuration to either the default configuration or the configuration last saved into non-volatile memory. The saved option will undo any changes made since the last save.

Actions: **RestoreConfiguration [Default | Saved]**

Information: **none**

SaveConfiguration

Many commands require a SaveConfiguration command to be executed. This will be indicated by the return Ready. *. When you invoke SaveConfiguration, the current configuration is permanently saved in the FibreBridge and the new configuration becomes the active configuration. If a firmware restart is required to make the requested change permanent, you will see a prompt asking you to confirm the restart. You can override this request by indicating the override value on the command line. You may make several changes through commands and SaveConfiguration before implementing the restart, but once you have restarted the FibreBridge, all the command changes created before the restart and save will be implemented. If you select the restart option, the FibreBridge will execute its complete start up cycle.

Limits: Restart or no Restart parameter is optional

Actions: **SaveConfiguration <Restart| NoRestart>**

Information: **none**

Returns: [Configuration saved |

Restart is necessary...

Do you wish to restart (y/n)? y

Restarting...]

VerboseMode

Specifies the detail of feedback for the command line interface. Disabling this option removes parameter names from action commands and removes descriptions from information commands.

Limits: enabled or disabled

Default: enabled (returns have parameter information)

Actions: **set VerboseMode [enabled | disabled]**

Information: **get VerboseMode**

7.1.2 Mapping commands

Access to SCSI devices is via Fibre Port and Fibre LUN addresses mapped to SCSI bus, target and LUNs. The factory default mapping is shown in Appendix A. CLI commands are used to modify the mapping.

The RouteXxxxx and AutoMap commands provide the mechanism to map Fibre Channel Port/LUN to SCSI bus/target/LUN. Host applications use the Fibre Port and Fibre LUN to access specific SCSI devices.

AutoMap establishes a default mapping of Fibre ports and Fibre LUNs, and the RouteXxxxx commands manage the mapping, including display of current mapping and modification.

RouteDisplay displays the current mapping, in Fibre port, Fibre LUN order, showing the mapped SCSI bus/target/LUN, and the current status of the device (online, offline, disabled). RouteDisplay may be used at any time.

RouteOffline, RouteChange, and RouteOnline modify the mapping as required (e.g. to make a device inaccessible, to replace a non-functioning mapped unit with another, to manage wear on tape drives).

Before modifying a map, set it “offline” via the RouteOffline command. This process notifies the FibreBridge to stop accepting SCSI commands (e.g. data transfers, inquiry, etc.) for the mapped device.

The RouteOffline command takes effect in two stages:

- 1 The device is marked “Going Offline”, indicating the FibreBridge will complete any current SCSI commands for the mapped device, and will reject any subsequent SCSI commands for that device.
- 2 When all current SCSI commands for the device are complete, the device status transitions to “Offline”, and the FibreBridge rejects any subsequent SCSI commands for that device.

After the device is “Offline” (verify this with the RouteDisplay command), use the RouteChange command to change its mapping. Use the RouteDisplay command to review the changes before setting the affected devices online.

When all changes are complete and correct, use the RouteOnline command to set the affected devices online. It is not necessary to set all mapped devices online: SCSI commands sent to offline devices are rejected.

Appendix A shows the sequence of AutoMap and RouteXxxxx commands.

AutoMap

Automatically maps all currently operational SCSI devices attached to the FibreBridge and distributes the devices among optional, user-specified FibreChannel ports.

Limits: Automapping skips unavailable (offline or failed) fibre and SCSI ports.

Actions:

AutoMap *Distributes devices across all Fibre Channel ports*

AutoMap fp *Distributes devices across fp*

AutoMap fp [fp] *Distributes devices across fp [fp]*

Automap fp [fp [fp]] *Distributes devices across [p [fp [fp]]]*

DispFcPortDB

Used to display the contents of the specified FC port’s internal port database which contains Fibre Channel addressing information for each FC target device visible to the FibreBridge.

Action: **none**

Information: **DispFcPortDB <fp>**

Returns: Node name, 24-bit port ID, 8-bit internal loop ID of each FC device

FcHard

Used to enable or disable Fibre Channel hard address assignment. Under soft addressing, the FibreBridge loop address is assigned during loop initialization. Use FcHardAddress (described below) if you enable hard addressing.

Limits: applies to all Fibre Channel ports

Default: enabled, or hard addressing

Actions: **set FcHard** [enabled | disabled]

Information: **get FcHard**

SaveConfiguration

FcHardAddress

Sets/displays the value used as the FC-AL hard address. This hexadecimal value represents the address the FibreBridge will try to use if hard addressing is enabled. When an optional address is not present, the current value is displayed.

Limits: Each port has individual hard address value.

Default: 0 <= hard id <= 0x7d

Configurations containing more than 1 FibreBridge 1190 board adhere to specific rules for assigning hard IDs: 4 (fp 0), 5 (fp1), and 6 (fp 2) on the second FibreBridge 1190.

Actions: **set FcHard Address** [fp] [[address]]

Information: **get FcHardAddress** [fp]

SaveConfiguration

verbose return: Port n FcHardAddress = 0x01

FibreBridgeTargetLUN

Specifies the soft target LUN(s) to be used by the FibreBridge when addressed by the host as a SCSI device.

Limits: Any map coinciding with the user-specified FibreBridgeTarget LUN must first be set to offline before trying to change it. This map will be unavailable upon power-cycling the FibreBridge.

The get form reports all FibreBridgeTargetLUNs currently NOT disabled. Specifying a port returns the status of that port.

Action: **set FibreBridgeTargetLUN** [fp] [fl] | [disabled]

Information: **get FibreBRidgeTargetLUN** <[fp]>

SaveConfiguration

Returns:
[Line Count]
[fp] [fl]

RouteChange

Maps a Fibre Channel port and LUN to a SCSI bus, target and LUN.

Limits: Attempts to map to a SCSI device currently online results in an error message

Valid entries (FibreBridge 4500 only): fp (0-2), fl (0-31), sb (0-3), st (0-15), sl (0-7)

Action: **RouteChange** [fp] [fl] [sb] [st] [sl]

Information: none

RouteDisplay

Returns a list of currently mapped Fibre Channel-to-SCSI routes sorted by Fibre Channel address and assembled according to the optional parameters specified. Each list is preceded by a count of the lines that immediately follow.

Valid status values

Online: able to accept SCSI commands

Unavailable: no device currently assigned to a particular route; SCSI commands will time-out

Offline: rejects any SCSI command

Going Offline: RouteOffline has been issued, but queued commands are underway; becomes Offline when all queued commands are complete; new SCSI commands sent to a going offline device are rejected

Action: **none**

Information:

RouteDisplay Displays all current maps

RouteDisplay [fp] Displays specified FC port maps

RouteDisplay [online|offline] Displays all maps with route status [online|offline]

RouteDisplay [fp [fl]] Displays the current map of fp & fl

RouteDispaly [fp [online|offline]] Displays all maps for a given FC port with route status [online|offline]

Returns:

[line count]

[fp] [fl] [sb] [st] [sl] [Online|Offline]

RouteOffline

Sets a route to offline or reports its status as offline or going offline

Action: **set RouteOffline [fp] [fl]**

Information: **get RouteOffline [fp]**

Returns: [fp] [fl] [sb] [st] [sl] [Going offline|Offline]

RouteOnline

Sets a route to online or reports its status.

Limits: if route is not currently mapped, command results in an error message

Action: **set RouteOnline [fp] [fl]**

Information: **get RouteOnline [fp]**

Returns: [fp] [fl] [sb] [st] [sl] [Online|Offline]

Returns:

[line count]

[fp] [fl] [sb] [st] [sl] [Online|Offline]

7.1.3 Diagnostic commands

ATTO FibreBridge™ diagnostic commands help validate FibreBridge operation and diagnose/isolate FibreBridge faults through the Event Log.

Event logging is a mechanism for on-site observation of internal FibreBridge behavior such as tracing SCSI commands received over the Fibre Channel from the host and return of data and status to the host.

CLI commands are case insensitive (upper and lower case allowed anywhere).

Commands generally follow a standard format:

[Get | Set] Command [Parameter 1 | Parameter 2] followed by the return or enter key

ClearEvent

Clears the contents of the event log.

Actions: **ClearEvent**

Information: **none**

DispEvent

Sets the switches which control the filtering performed when displaying events.

Limits: To display from several different subsystems or events, use a mask value equal to the logical OR of the corresponding values. To display events from all subsystems, enter [0x7F] as the mask

Default: [0x7F] 0x3F [all]

[subsystem] controls which subsystem's events display

[event_level] controls what report level events display

0x01 FCP Processor/i960 Interaction

0x01 Info: general information

0x02 SCSI Processor/i960 Interaction

0x02 Warning: unexpected situation/condition

0x04 Ethernet

0x04 Critical: operation limited/curtailed

0x08 Extended copy

0x08 Failure: hard failure

0x20 NVARM & Flash

0x10:Other

0x40 ECC failures

0x20 Debug: ATTO tracking events

[status] [all]: all events regardless of status values

[ngood]: only events with a status value other than good

Actions: **set DispEvent [subsystem] [event_level]**

Information: **getDispEvent**

[status]

Verbose return: DispEvent=SubSys:0xXX Lv1:0xXX

Status: [all | no good]

SaveConfiguration

DisplayEvent

Results in a display of the current contents of the event log to the display. The log is filtered by the current switch settings as described in the DispEvent command. If the optional all parameter is provided, the display filtering is temporarily suspended and all logged events are displayed regardless of the current event filter switch settings.

Actions: **DisplayEvent <all>**

Information: **none**

EccLog

Contains the ECC error statistics for the FibreBridge since the statistics were last cleared. Set form sets the statistics to zero.

Limits: Maximum number of errors reported = 65535

Actions: **set EccLog clear**

Information: **get EccLog**

ErrorLog

Set form clears ErrorLog since previous error reported. Get form shows error messages since the report was last cleared.

Actions: **set ErrorLog clear**

Returns: Error Logs cleared

Information: **get ErrorLog**

Returns: The last error code save was xx

An error of type xxx was detected since last error log clearing
Specific error text.

IdentifyFibreBridge

Enabling this option causes the Ready LED on the front panel of the FibreBridge to blink until the parameter is disabled.

Actions: **set IdentifyFibreBridge [enabled|disabled]**

Information: **get IdentifyFibreBridge**

SaveConfiguration**LogEvent**

Sets the switches which control the filtering performed when logging events.

Limits: To display from several different subsystems or events, use a mask value equal to the logical OR of the corresponding values. To display events from all subsystems, enter [0x7F] as the mask

Default: [disabled]

[subsystem] controls which subsystem's events display

0x01 FCP Processor/i960 Interaction

0x02 SCSI Processor/i960 Interaction

0x04 Ethernet

0x08 Extended copy

0x20 NARM & Flash

0x40 ECC failures

[event_level] controls what report level events display

0x01 Info: general information

0x02 Warning: unexpected situation/condition

0x04 Critical: operation limited/curtailed

0x08 Failure: hard failure

0x10 Other;

0x20 Debug: track events

[status] [all]: all events regardless of status values

[ngood]: only events with a status value other than good

Actions: **set LogEvent [enabled | disabled] |**

[[subsystem] [event_level] [status]]

Information: **getLogEvent**

SaveConfiguration

ParityLog

Contains the parity error statistics for the FibreBridge since the statistics were last cleared. The set form sets the statistics to zero.

Limits: 65,535 maximum number of errors

Action: **set ParityLog clear**

Information: **get ParityLog**

SaveConfiguration

Returns:

Parity Errors:

FibreChannel 0xnnn

SCSI 0xnnn

Performance

Returns the performance data for the Fibre Channel port you specify. Data includes the average rate (MBs per sec.) and number of I/Os measured over the previous sampling period where a sampling period is approximately one second. Requesting performance data for a FC port which has been disabled or has failed will result in the display of an error message ("ERROR Disabled Fibre Channel port" or "ERROR Failed Fibre Channel port"). Reported performance may be affected by FC port and SCSI bus availability and saturation, SCSI device speeds and overall system use.

Limits: Successful SCSI Read (08h, 28h) and Write (0Ah, 2Ah) commands are considered I/Os.

Valid FC port (fp) entries are [0|1|2] depending on

FibreBridge model

Actions: **none**

Information: **get Performance <fp>**

Verbose return:

[line count]

; fp MB/s IO/s

[fp] [mmm.mmm] [nnn]

7.1.4 SCSI configuration commands

The SCSI ports are configured with default settings but may be customized to your specifications using the CLI commands in this section.

CLI commands are case insensitive (upper and lower case allowed anywhere).

Commands generally follow a standard format:

[Get | Set] Command [Parameter 1 | Parameter 2] followed by the return or enter key

ScsiInitID

Specifies the SCSI initiator ID to be used on the specified SCSI port. All maps coinciding with the user-specified ScsiInitID must be set to offline and will become invalid upon issuing this command

Limits: [0-15] wide [0-7] narrow

Action: **set ScsiInitID [sb [0-15]]**

Information: **get ScsiInitID**

SaveConfiguration

ScsiPortBusSpeed

Controls the transfer rate at which the FibreBridge will attempt to negotiate with its SCSI devices.

Limits: Fast SCSI, Ultra SCSI, Ultra 2 SCSI (valid only if FibreBridge has LVD-capable SCSI ports) Default:

Actions: **set ScsiPortBusSpeed [Port Number [fast|ultra|ultra2]**

Information: **get ScsiPortBusSpeed**

SaveConfiguration

ScsiPortList

Returns a list of available SCSI ports and their current status

Limits: valid status values are OK and Failed

Action: **none**

Information: **ScsiPortList**

ScsiPortResetOnStartup

Specifies whether the SCSI port should be reset on power-up or not

Limits: [enabled | disabled]

Default: enabled

Action: **set ScsiPortResetOnStartup [sb [enabled | disabled]]**

Information: **get ScsiPortResetOnStartup [sb]**

SaveConfiguration

ScsiPortSelTimeout

Indicates the time, in milliseconds, that the bridge waits for a response from a SCSI device on the selected port after a selection request. Setting a long selection time-out value can result in the host generating system time-out.

Limits: [256] 128|64|32|16|8|4|2|1

Default: 64ms

Action: **set ScsiPortSelTimeout [sb [256 | 128 | 64 | 32 | 16 | 8 | 4 | 2 | 1]]**

Information: **get ScsiPortSelTimeout [sb]**

SaveConfiguration

ScsiPortSyncTransfer

Specifies whether synchronous SCSI transfers should be negotiated with devices on the specified SCSI port.

Limits: [enabled | disabled]

Default: enabled

Action: **set ScsiPortSyncTransfer [[sb [enabled | disabled]]**

Information: **get ScsiPortSyncTransfer [sb]**

SaveConfiguration

ScsiPortTaggedQueuing

Specifies whether tagged command queuing is allowed on the SCSI port.

Limits: [enabled | disabled]

Default: enabled

Action: **set ScsiTaggedQueuing [sb [enabled|disabled]]** Information: **get ScsiTaggedQueuing [sb]**

SaveConfiguration

ScsiPortUltra2

Specifies whether the selected port supports Ultra2 (LVD) transfers

Limits: effective only if specified port is LVD SCSI bus

Action: **set ScsiPortUltra2 [sb [enabled|disabled]]** Information: **get ScsiPortUltra2 [sb]**

SaveConfiguration

ScsiPortWideTransfer

Specifies whether wide SCSI transfers should be negotiated.

Default: enabled

Action: **set ScsiPortWideTransfer [sb[enabled|disabled]]** Information: **get ScsiPortWideTransfer [sb]**

SaveConfiguration

ScsiTargets

Returns a list of SCSI devices operational on the referenced SCSI port.

Action: **none**

Information: **ScsiTargets [sb]**

Returns: [line count]

[sb] [st] [sl] [device type] [vendor ID] [product ID] [revision] [serial number]

ScsiTermination

Configures/reports the SCSI internal termination of the SCSI port identified.

Default: enabled

Action: **set ScsiTermination [sb [enabled | disabled]]** Information: **get ScsiTermination [sb]**

SaveConfiguration

7.1.5 Fibre Channel configuration commands

The Fibre Channel ports are configured with default settings but may be customized using the CLI commands in this section.

CLI commands are case insensitive (upper and lower case allowed anywhere).

Commands generally follow a standard format:
[Get | Set] Command [Parameter 1 | Parameter 2] followed by the return or enter key

FcAck0

Specifies whether ACK0 or ACK1 will be returned in response to a Class 2 FC data frame or sequence.

Limits: Enable sends ACK0 at the end of a sequence. Disable returns an ACK1 frame for each data frame.

Action: **set FcAck0 [enabled | disabled]**

Information: **get FcAck0**

SaveConfiguration

Returns: [fp] [fl] [sb] [st] [sl] [Online|Offline]

FcClass2

Specifies if the FibreBridge will support Fibre Channel Class 2 (multiplexed) service.

Limits: [enabled | disabled]

Default: Class 3

Action: **set FcClass2 [enabled | disabled]**

Information: **get FcClass2**

SaveConfiguration

FcConnMode

Controls/reports the connection mode the FibreBridge uses when communication across a Fibre Channel network, either to an arbitrated loop (FC-AL) when you select loop mode, or point-to-point when you choose ptp.

Limits: applies to all Fibre Channel ports

Default: loop

Actions: **set FcConnMode [loop | ptp]**

Information: **get FcConnMode**

SaveConfiguration

FcFairArb

Turns the Fibre Channel Arbitrated Loop (FC-AL) arbitration fairness on or off. Enabling this feature causes the FibreBridge to follow the arbitration fairness rules on the FC-AL.

Limits: applies to all Fibre Channel ports

Default: on, enabling arbitration fairness

Actions: **setFcFairArb [enabled | disabled]**

Information: **getFcFairArb**

SaveConfiguration

FcFrameLength

Specifies the maximum number of payload bytes (the maximum size) in a Fibre Channel frame. If not specified in the set command, current frame length is displayed. The active frame length is always negotiated with the host, hub or switch.

Limits: applies to all Fibre Channel ports

Default: 2048

Actions: **set FcFrameLength [512 | 1024 | 2048]**

Information: **get FcFrameLength**

SaveConfiguration

FcFullDuplex

FcFullDuplex enabled allows full duplex Fibre Channel communication between the FibreBridge and other Fibre Channel devices. Disable FcFullDuplex results in half duplex mode.

Limits: applies to all Fibre Channel ports

Default: enabled

Actions: **setFcFullDuplex [enabled | disabled]**

Information: **get FcFullDuplex**

SaveConfiguration

FcInitiator

Allows FibreBridge to operate as an initiator on the Fibre Channel network, an attribute required for features such as Extended Copy.

Actions: **set FcInitiator [enabled | disabled]**

Information: **get FcInitiator**

SaveConfiguration

FcPortList

Returns a list of available Fibre Channel ports and their current status.

Limits: valid status values are OK and Failed

Actions: **none**

Information: **FcPortList**

Returns: [line count] [fp] [status]

FcSCSIBusyStatus

Specifies the SCSI status value returned when the FibreBridge is unable to accept a SCSI command because of a temporary lack of resources.

Limits: [busy | qfull]

Default: busy

Actions: **set FcSCSIBusyStatus [busy | qfull]**

Information: **get FcSCSIBusyStatus**

SaveConfiguration

FcTargets

Obtains information about every Fibre Channel target device visible to a FibreBridge operating in initiator mode; devices may be used as targets for initiator mode features such as Extended Copy.

Actions: **none**

Information: **FcTargets**

Returns: Node Name, FC LUN & inquiry data for each FC device found

FcWWName

Reports the Word Wide Name (WWN) of the Fibre Channel interface. Each FC port has an individual and unique WWN. The least significant 6 bits of the WWN are used as the Ethernet MAC address.

Limits: Fabric and loop operations are unpredictable if duplicate WWNs are assigned.

Actions: **none**

Information: **get FcWWN [PortNumber]**

Return: Port n FcWWName= 20 00 00 10 86 nn nn nn

FibreBridgeTargetLUN

Specifies the soft target LUN(s) to be used by the FibreBridge when addressed by the host as a SCSI device.

Limits: Any map coinciding with the user-specified FibreBridgeTarget LUN must first be set to offline before trying to change it. This map will be destroyed upon power-cycling the FB.

Disabling a FibreBridgeTargetLUN for a particular FC port will destroy the map to the FB 1190 for that port.

The get form reports all FibreBridgeTargetLUNs currently NOT disabled. Specifying a port returns the status of that port.

Action: **set FibreBridgeTargetLUN [fp] [fl] | [disabled]]**

Information: **get FibreBRidgeTargetLUN <[fp]>**

SaveConfiguration

Returns:

[Line Count]

[fp] [fl]

7.1.6 Serial Port configuration commands

The ATTO FibreBridge™ serial ports are configured with default settings but may be customized to your specifications using the CLI commands in this section.

CLI commands are case insensitive (lower case allowed anywhere).

Commands generally follow a standard format:
[Get | Set] Command [Parameter 1 | Parameter 2]
followed by the return or enter key

SerialPortBaudRate

Configures/reports the baud rate for the FibreBridge RS-232 serial port. The number of data bits per character is fixed at 8 with no parity.

Limits: 2400, 9600, 19200, 38400, 57600, 115200

Default: 11520

Actions: **set SerialPortBaudRate [2400 | 9600 | 19200 | 38400 | 57600 | 115200]**

Information: **get SerialPortBaudRate**

SaveConfiguration

SerialPortEcho

Enables/disables/reports the echoing of keyboard input. When enabled, all non-control character keyboard input is output to the display.

Limits: Local ASCII terminal (or terminal emulator) echo settings should be set to disabled while using SerialPortEcho enabled

Default: enabled

SerialPortEcho enabled

Actions: **setSerialPortEcho [enabled | disabled]**

Information: **get SerialPortEcho**

SaveConfiguration Restart

SerialPortHandshake

Configures/reports the data handshaking method used to control the flow between the transmitter and receiver using hardware flow control, software flow control (Xon/Xoff) or no flow control.

Limits: hard (hardware flow control), xon (software flow control) or no flow control (none)

Default: no flow control (none)

Actions: **set SerialPortHandshake [hard | xon | none]**

Information: **getSerialPortHandshake**

SaveConfiguration

SerialPortStopBits

Configures/reports the number of stop bits per character for the FibreBridge RS -232 serial port. The number of data bits per character is fixed at 8 with no parity.

Limits: 1 or 2

Default: 1 stop bit

Actions: **set SerialPortStopBits [1 | 2]**

Information: **get SerialPortStopBits**

SaveConfiguration

7.1.7 Ethernet configuration commands

The ethernet configuration commands configure the Ethernet and TCP/IP parameters for FibreBridge models with Ethernet ports.

CLI commands are case insensitive (upper and lower case allowed anywhere).

Commands generally follow a standard format:

[Get | Set] Command [Parameter 1 | Parameter 2] followed by the return or enter key

EthernetSpeed

Sets/displays the current speed of the Ethernet connection.

Limits: [10 | 100 | Auto]

Actions: **set EthernetSpeed xxx.xxx.xxx.xxx**

SaveConfiguration

Default: auto

Information: **get EthernetSpeed**

Returns: [10 | 100 | auto ([10 | 100 | UNKNOWN])]

If auto enabled, value in parentheses indicates current speed

IPAddress

Sets/displays the current FibreBridge IP address.

Limits: If IPDHCP is enabled (see below), get command reports current IP address assigned by DHCP server

Actions: **set IPAddress xxx.xxx.xxx.xxx**

SaveConfiguration

Default IP Address: 010.000.000.001

Information: **get IPAddress**

IPDHCP

Selecting DHCP allows the FibreBridge to request an IP address from the network.

Limits: The network must have at least one DHCP server

Actions: **set IPDHCP [enabled | disabled]**

SaveConfiguration

Default: disabled

Information: **get IPDHCP**

IPGateway

Sets/displays the current gateway.

Limits: If IPDHCP is enabled (see above), get command reports current IP gateway assigned by DHCP server

Actions: **set IPGateway xxx.xxx.xxx.xxx**

SaveConfiguration

Default: 000.000.000.000

Information: **get IPGateway**

IPSubnetMask

Sets/displays the current subnet mask.

Limits: If IPDHCP is enabled (see above), get command reports current subnet mask assigned by DHCP server

Actions: **set IPSubnetMask xxx.xxx.xxx.xxx**

SaveConfiguration

Default: 255.255.255.000

Information: **get IPSubnetMask**

7.1.8 Maintenance commands

The CLI commands outlined in this chapter may be used to get information or perform functions which are used in a variety of situations with the ATTO FibreBridge™.

CLI commands are case insensitive (upper and lower case allowed anywhere).

Commands generally follow a standard format:

[Get | Set] Command [Parameter 1 | Parameter 2]
followed by the return or enter key

FibreBridgeModel

Reports model information about a specific FibreBridge

Action: **none**

Information: **get FibreBridgeModel**

Returns:

FibreBridge 1190

©2001 ATTO Technology, Incorporated

Firmware version mm..mm release date mm.dd.yyyy, hh:mm:ss

Build zzzz

FirmwareRestart

Causes the FibreBridge to reboot, then re-initialize its firmware.

Actions: **FirmwareRestart**

Information: **none**

SerialNumber

Reports the FibreBridge serial number which is unique for each FibreBridge. The serial number tracks the board throughout its life and should not be changed for any reason.

Limits: set form requires operator privileges

Actions: **set SerialNumber**

Information: **get SerialNumber**

Verbose return:

Part Identifier: PPPPPP Sequence Number: nnnnnn

MaxEnclTempAlrm

Sets/displays the maximum enclosure temperature alarm of the unit in degrees Celsius. If the temperature of the FibreBridge rises above the maximum MaxEnclTempAlrm, thermal control event handling occurs.

Limits: valid entries are between 0 and 70 degrees and above the current minimum enclosure temperature alarm

Default: 70° C

Actions: **set MaxEnclTempAlrm [0-70]**

Information: **get MaxEnclTempAlrm**

SaveConfiguration

MinEnclTempAlrm

Sets/displays the minimum enclosure temperature alarm of the unit in degrees Celsius. If the temperature of the FibreBridge falls below the minimum MinEnclTempAlrm, thermal control event handling occurs.

Limits: valid entries are between 0 and 70 degrees and below the current maximum enclosure temperature alarm

Default: 0° C

Actions: **set MinEnclTempAlrm [0-70]**

Information: **get MinEnclTempAlrm**

SaveConfiguration

ScsiPortReset

Resets the specified SCSI bus.

Actions: **ScsiPortReset [sb]**

Information: **none**

Temperature

Returns the current internal temperature of the unit in degrees Celsius.

Actions: **none**

Information: **get Temperature**

Zmodem

Allows transfer of a firmware image to or from the FibreBridge using the ZMODEM file transfer protocol.

Limits: available only through the RS232 interface

WARNING After a firmware image is downloaded to the FibreBridge, the image is placed into flash memory. During this time (about 30 seconds), DO NOT remove power to the FibreBridge or the flash may become corrupted.

Actions: **Zmodem [Send filename | Receive]** Information: **none**

SaveConfiguration

Returns: ZMODEM transfer complete on success

ERROR with status message on failure

7.2 In-band CLI using SCSI over Fibre Channel port

In-band Command Line Interface (CLI) configures and manages the ATTO FibreBridge™ using SCSI-based CLI commands over a fibre port connection.

In-band CLI allows a programmer to configure the FibreBridge while it is moving data. Using a programmer's interface, ATTO FibreBridge Services CLI commands, as described previously in this manual, may be implemented. The only command not available is *menu*.

In-band CLI is implemented as a device separate from the FibreBridge itself. It uses a different LUN than the FibreBridge, and reports as a Storage Enclosure Services (SES) device (device type 0x0D). This LUN is referred to as the ServicesLUN.

The ServicesLUN is visible on all fibre ports but is actually a single unit. The default fibre LUN for each fibre port's ServicesLUN is 0x08.

The ServicesLUN must be reserved for each Write Buffer/Read Buffer pair, using the SCSI Reserve command to insure integrity of the in-band CLI session.

- 1 An initiator (host) sends a SCSI Reserve command to the ServicesLUN.**
 - If the ServicesLUN is not reserved by another initiator, the ServicesLUN is now reserved and ready to begin a new CLI session.
 - If the FibreBridge configuration is reserved by a different CLI session (i.e. serial or Telnet), the in-band session will not be allowed to modify the FibreBridge configuration. If you try, the results buffer of the ServicesLUN will return:
Process X has the configuration reserved.
ID of this session = Y
Ready.
- 2 The initiator issues a SCSI WriteBuffer (buffer ID = 0) command to the ServicesLUN. A WriteBuffer command must be**

accompanied by an ASCII buffer representing the CLI command string such as

```
set FibreBridgeName FB1190
```

- 3 The ServicesLUN will execute the command line and created feedback in the form of ASCII characters into a buffer. This buffer is 8KB and circular. Retrieve the results by issuing a ReadBuffer command before issuing another WriteBuffer command.**
- 4 A subsequent WriteBuffer command will execute the new command line and overwrite the previous results in the buffer with new results.**
- 5 The ServicesLUN can be released by issuing a SCSI Release command to the Services LUN after each Write/Read Buffer pair, or multiple Write/Read Buffer pairs. (See Exhibit 7.2-1 for an example)**

I/O details

The buffer sent to the Services LUN during the data out phase of a Write Buffer command must be:

- ASCII data
- maximum 80 bytes length
- terminated with either a carriage return character (0x0D), line feed character (0x0A) or NULL character (0x00)
- Characters following the first carriage return character, line feed character or NULL character are ignored.

The buffer retrieved from the Services LUN during the data-in phase of a Read Buffer command will be:

- ASCII data
- maximum 8 KBytes (8192 bytes) in length
- terminated with a NULL character (0x00)

→ Characters following the NULL character are meaningless.

returned to an initiator that specifies an incorrect Buffer ID, Mode, Length or Buffer Offset. The Mode is always Data (0x2), the Buffer ID is always 0 and the Buffer Offset is always 0.

A CHECK_CONDITION, INVALID_PARAMETER_IN_CDB will be

Exhibit 7.2-1 The SCSI command process: reserve the FibreBridge, send the command, release the FibreBridge.

Initiator/Host	FibreBridge
Goal: reserve the FibreBridge for an in-band CLI command	
SCSI cdb: Reserve ServicesLUN	=>
	<= SCSI success
Goal: retrieve the FibreBridge temperature via in-band CLI	
1. Issue the command:	
SCSI cdb: WriteBuffer ServicesLUN, bid=0, "get Temperature\n"	=> places "Temperature=28C\n\r" into the read-data buffer
	<= SCSI success
2. Retrieve the results:	
SCSI cdb: ReadBuffer ServicesLUN, bid=0	=>
	<= Returns "Temperature=28C\n\r" from the read-data buffer
	<= SCSI success
Goal: release the FibreBridge for other in-band users	
SCSI cdb: Release ServicesLUN	=>
	<= SCSI success

8 Serverless backup support

Serverless Backup is an application that allows data to be copied between two storage devices (Fibre Channel disks, SCSI disks and SCSI tapes) with minimal intervention from a server.

As the volume of data on a network grows, the resources required to back up this data also grow. Data protection requires that large volumes of data be copied from on-line storage devices to dedicated archive devices. This places a very heavy load on the host processors, I/O busses, memory busses, and front-end network, thus reducing the servers ability to “serve” its clients, as well as a general reduction in performance.

Serverless Backup uses the Extended Copy command compliant with T10/99-143r1 to allow a “copy manager” (the FibreBridge) to execute all of the read and write operations necessary to move data. Blocks of data are moved directly from the Fibre Channel storage through the bridge to SCSI tape or from SCSI storage through the bridge to the SCSI tape, all at Fibre Channel and SCSI speeds (as compared to moving data across the Ethernet network).

The ATTO FibreBridge™ will execute Extended Copy commands to and from SCSI tape drives connected directly to the FibreBridge. The hard drives you are backing up or restoring to can be anywhere on the Storage Area Network, including SCSI drives attached to the bridge. The Extended Copy command contains target and segment descriptors used to define which data is to be moved between which devices.

Target Descriptors allow the host to describe the devices involved in the Extended Copy. To be compatible with all copy agent application packages, the FibreBridge implementation supports World Wide Name, N_Port ID, and WWN plus N_Port ID descriptor types.

Segment Descriptors describe the data to copy and how much of it to copy. The two most common types of Segment Descriptors are “block

(disk) to stream (tape)” and “stream (tape) to block (drive)”. The FibreBridge supports “block to block,” “stream to stream,” “inline to stream,” and “stream to discard.”.

The FibreBridge will support copying up to 830 Megabytes of data in a single Extended Copy command. Larger files must be backed up or restored using additional operations. The bridge can support up to two simultaneous Extended Copy commands.

Please check the ATTO Technology, Inc. web site at www.attotech.com for a complete list of all of the applications supported as well as detailed installation and configuration tips.

How serverless backup works

- 1 A copy “agent” on the server provides a user interface to begin a backup or restore operation as well as manage and synchronize the movement of data sets. This copy agent is either included or available as an add-on with many high-end tape backup software applications on the market.**
- 2 The server sends a single Extended Copy command to the FibreBridge or to a SCSI device beyond the bridge.**
- 3 The bridge interprets the segment descriptors and issues read commands to the appropriate devices.**
- 4 Once enough data is read, the bridge will issue write commands to the appropriate device.**
- 5 Once all of the segment descriptors have been executed, the bridge will send status to the copy agent running in the server. The data never passes through the server, thus freeing the CPU and Memory to process other requests.**

To enable serverless backup on the FibreBridge:

- 1 Access the FibreBridge either through RS-232 or Ethernet.
- 2 After the *Ready* prompt, type *set Fcinitiator enabled*.
- 3 At the next *Ready* prompt, type *saveconfiguration restart*.
- 4 The FibreBridge is now ready to perform serverless backup.

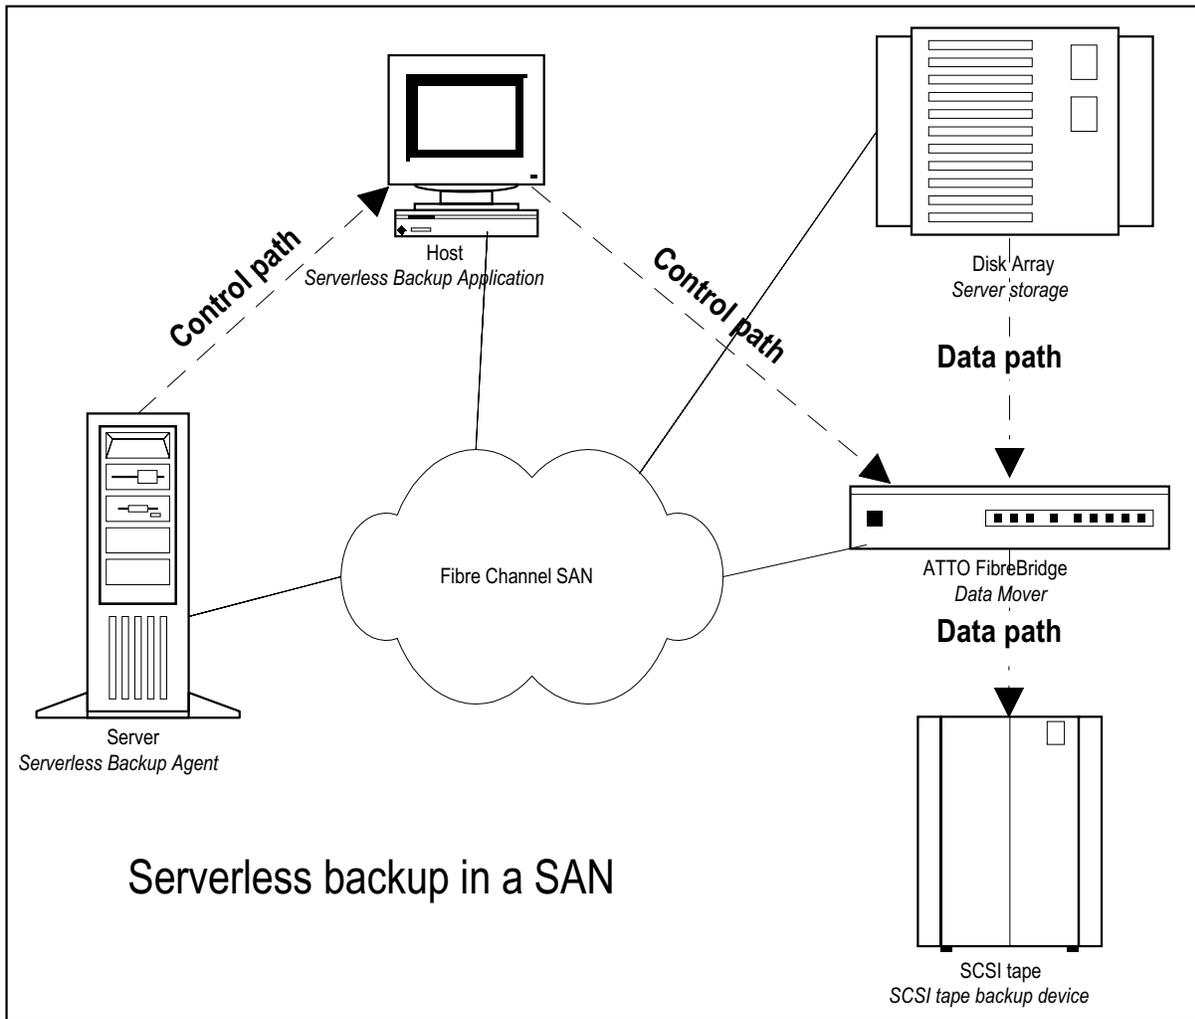


Exhibit 8-1 Once the server sends a command to the FibreBridge for extended copy, the FibreBridge manages the backup procedure, by-passing the server.

9 Updating firmware

The ATTO FibreBridge™ has several processors which control the flow of data. The firmware to control these processors can easily be upgraded in the field using the WriteBuffer command over the in-band Fibre Channel connection, PUT command from an FTP connection, or ZModem utility over an RS-232 serial connection.

The FibreBridge firmware is distributed as a compressed .JAR file and can be obtained from the ATTO Technology, Inc. web site at www.attotech.com.

To use FTP over Ethernet to flash new firmware into the FibreBridge:

- 1 Uncompress the .JAR file obtained from the ATTO Technology Inc. website (www.attotech.com) into an image file (.IMA).

Note: the .JAR file can be uncompressed using any utility that supports the “zip” format.

- 2 Establish an FTP link to the bridge that is to be flashed.
- 3 Use the PUT command to download the firmware. For example:
\$ PUT c:\bridge_firmware\FB3200100.IMA
- 4 Once the download is complete, cycle power on the FibreBridge to implement the new firmware.

To use the ZModem command over the RS-232 serial link to load new firmware:

- 1 Uncompress the .JAR file obtained from the ATTO Technology Inc. website (www.attotech.com) into an image file (.IMA).

Note: the .JAR file can be uncompressed using any utility that supports the “zip” format.

- 2 Load a Terminal Program such as Hyper Terminal.

- 3 Set the terminal and the FibreBridge for the highest possible baud rate for your terminal. Default parameters are: 9600 baud, N, 8, 1 no handshaking and ASCII Terminal.
- 4 Turn on power to the FibreBridge.
- 5 Once the Ready prompt appears, type ZMODEM RECEIVE. The FibreBridge will display that it is preparing to receive a file from your terminal program.
- 6 On the terminal program, choose Transfer Send File
- 7 In the Send File Box, enter the current FibreBridge .ima file or click the browse button to find it
- 8 Click Send File
- 9 The FibreBridge should acknowledge receiving the file and display a message not to interrupt power for 90 seconds. Do not interrupt the flash process. Do not power down the the host or the FibreBridge until the display returns the Ready prompt. Interrupting the flash process will make your FibreBridge inoperable and you will have to return it to ATTO Technology for repair.

WARNING Do not interrupt the flash process. Do not power down the the host or the FibreBridge until the display returns the Ready prompt. Interrupting the flash process will make your FibreBridge inoperable and you will have to return it to ATTO Technology for repair.

- 10 Once the download is complete, cycle power on the FibreBridge to invoke the new firmware.

Index: Command Line Interface commands

AutoMap	16	LogEvent	20
ClearEvent	19	MaxEnclTempAlrm	27
DispEvent	19	MinEnclTempAlrm	27
DispFcPortDB	16	ParityLog	20
DisplayEvent	19	Performance	20
EccLog	19	Reserve	15
ErrorLog	19	RestoreConfiguration	15
EthernetSpeed	26	RouteChange	17
FcAck0	23	RouteDisplay	17
FcClass2	23	RouteOffline	18
FcConnMode	23	RouteOnline	18
FcFairArb	23	SaveConfiguration	15
FcFrameLength	23	ScsilnitID	21
FcFullDuplex	23	ScsiPortBusSpeed	21
FcHard	17	ScsiPortList	21
FcHardAddress	17	ScsiPortReset	27
FcInitiator	24	ScsiPortResetOnStartup	21
FcPortList	24	ScsiPortSelTimeout	21
FcSCSIBusyStatus	24	ScsiPortSyncTransfer	21
FcTargets	24	ScsiPortTaggedQueuing	22
FcWWName	24	ScsiPortUltra2	22
FibreBridgeModel	27	ScsiPortWideTransfer	22
FibreBridgeName	15	ScsiTargets	22
FibreBridgeTargetLUN	17	ScsiTermination	22
FibreBridgeTargetLUN	24	SerialNumber	27
FirmwareRestart	27	SerialPortBaudRate	25
Help	15	SerialPortEcho	25
IdentifyFibreBridge	20	SerialPortHandshake	25
Info	15	SerialPortStopBits	25
IPAddress	26	Temperature	27
IPDHCP	26	VerboseMode	15
IPGateway	26	Zmodem	28
IPSubnetMask	26		

Appendix A Examples of command usage

RouteXxxxx commands

The RouteXxxxx commands are: AutoMap, RouteChange, RouteDisplay, RouteOffline, RouteOnline. (See Chapter 8.1.2 for more explanation).

Following are samples of the RouteXxxxx command interaction showing actual commands and their output to the Services port.

```
Ready.
ScsiPortList
5
;SCSI Port      Port Status
0                O.K.
1                Disabled
2                O.K.
3                Failed
```

```
Ready.
FcPortList
4
;Fibre Port     Port Status
0                O.K.
Failed
O.K.
```

```
Ready.
set RouteOffline 0 3
```

```
Ready.
get RouteOffline 0 3
;fp fl sb st sl On/Offline
0 3 3 0 0 Offline
```

```
Ready.
RouteChange 0 3 3 0 0
```

```
Ready.
set RouteOnline 0 3
```

```
Ready.
get RouteOnline 0 3
;fp fl sb st sl On/Offline
0 3 3 0 0 Online
```

```
Ready.
RouteDisplay 0 3
6
```

```
;fp fl sb st sl On/Offline
0 3 3 0 0 Online
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved
```

```
Ready.
RouteDisplay 0 online
10
;fp fl sb st sl On/Offline
0 0 0 3 0 Online
0 1 0 3 1 Online
0 2 2 0 0 Online
0 3 3 0 0 Online
0 4 xx xx xx 4500
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved
```

```
Ready.
RouteDisplay online
18
;fp fl sb st sl On/Offline
0 0 0 3 0 Online
0 1 0 3 1 Online
0 2 2 0 0 Online
0 3 3 0 0 Online
0 4 xx xx xx 4500
1 0 0 1 0 Online
1 1 1 1 0 Online
1 2 2 1 0 Online
1 3 3 1 0 Online
2 0 0 2 0 Online
2 1 1 2 0 Online
2 2 2 2 0 Online
2 3 3 2 0 Online
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved
```

```
Ready.
RouteDisplay 0
32
;fp fl sb st sl On/Offline
0 0 0 3 0 Online
```

```

0 1 0 3 1 Online
0 2 2 0 0 Online
0 3 3 0 0 Online
0 4 xx xx xx 4500
0 5 xx xx xx Offline
0 6 xx xx xx Offline
..
0 30 xx xx xx Offline
0 31 xx xx xx Offline
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved

Ready.
RouteDisplay
96
;fp fl sb st sl On/Offline
0 0 0 3 0 Online
0 1 0 3 1 Online
0 2 2 0 0 Online
0 3 3 0 0 Online
0 4 xx xx xx 4500
0 5 xx xx xx Offline
0 6 xx xx xx Offline
..
0 30 xx xx xx Offline
0 31 xx xx xx Offline
1 0 0 1 0 Online
1 1 1 1 0 Online
1 2 2 1 0 Online
1 3 3 1 0 Online
1 4 xx xx xx Offline
1 5 xx xx xx Offline
..
1 30 xx xx xx Offline
1 31 xx xx xx Offline
2 0 0 2 0 Online
2 1 1 2 0 Online
2 2 2 2 0 Online
2 3 3 2 0 Online
2 4 xx xx xx Offline
2 5 xx xx xx Offline
..
2 30 xx xx xx Offline
2 31 xx xx xx Offline
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved

Ready.

set RouteOffline 0 0

Ready.
get RouteOffline 0 0
;fp fl sb st sl On/Offline
0 0 0 3 0 Offline

Ready.
set FibreBridgeTargetLUN 0 0

Ready.
get RouteOnline 0 0
;fp fl sb st sl On/Offline
0 0 xx xx xx 4500

Ready.
get FibreBridgeTargetLUN 0
2
;fp fl
0 0

Ready.
set RouteOffline 1 1

Ready.
get RouteOffline 1 1
;fp fl sb st sl On/Offline
1 1 1 1 0 Offline

Ready.
set ScsiInitId 1 0

Ready.
get ScsiInitId 1
Port 1 ScsiInitId = 0

Ready.
RouteDisplay 1 1
6
;fp fl sb st sl On/Offline
1 1 xx xx xx Offline
xx xx 0 7 0 Reserved
xx xx 1 0 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved

Ready.

```

AutoMap Command Sequences

The following are examples of typical command sequences used in issuing an AutoMap command. Both the actual commands as well as their output to the Services port are shown.

```
Ready.
ScsiPortList
5
;SCSI Port      Port Status
0              O.K.
1              O.K.
2              O.K.
3              O.K.

Ready.
FcPortList
4
;Fibre Port      Port Status
0              O.K.
O.K.
O.K.

Ready.
RouteDisplay online
15
;fp fl sb st sl On/Offline
0 0 0 0 0 Online
0 1 1 4 0 Online
0 2 2 2 0 Online
0 7 xx xx xx 4500
1 0 3 4 0 Online
1 1 0 2 0 Online
1 2 1 5 0 Online
2 0 2 3 0 Online
2 1 3 5 0 Online
2 2 0 3 0 Online
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved

Ready.
AutoMap
Setting device offline: FC 0 Lun 0.
Setting device offline: FC 0 Lun 1.
Setting device offline: FC 0 Lun 2.
Setting device offline: FC 0 Lun 7.
Setting device offline: FC 1 Lun 0.
Setting device offline: FC 1 Lun 1.
Setting device offline: FC 1 Lun 2.
Setting device offline: FC 2 Lun 0.
Setting device offline: FC 2 Lun 1.

Setting device offline: FC 2 Lun 2.
Scanning SCSI bus 0
Scanning SCSI bus 1
Scanning SCSI bus 2
Scanning SCSI bus 3
SCSI bus 1 scan complete.
SCSI bus 2 scan complete.
SCSI bus 3 scan complete.
SCSI bus 0 scan complete.

Ready.
RouteDisplay online
17
;fp fl sb st sl On/Offline
0 0 0 0 0 Online
0 1 0 2 0 Online
0 2 0 3 0 Online
0 3 xx xx xx 4500
1 0 1 4 0 Online
1 1 1 5 0 Online
2 2 2 0 Online
1 3 xx xx xx 4500
2 0 2 3 0 Online
2 1 3 4 0 Online
2 3 5 0 Online
2 3 xx xx xx 4500
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved
...

Ready.
ScsiPortList
5
;SCSI Port      Port Status
0              O.K.
1              Failed
2              O.K.
3              Disabled

Ready.
FcPortList
4
;Fibre Port      Port Status
0 O.K.
1              Failed
2              O.K.
```

```

Ready.
RouteDisplay online
17
;fp fl sb st sl On/Offline
0 0 0 0 0 Online
0 1 1 4 0 Online
0 2 2 2 0 Online
0 3 xx xx xx 4500
1 0 3 4 0 Online
1 1 0 2 0 Online
1 2 1 5 0 Online
1 3 xx xx xx 4500
2 0 2 3 0 Online
2 1 3 5 0 Online
2 2 0 3 0 Online
2 3 xx xx xx 4500
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved

Ready.
AutoMap 0 2
Setting device offline: FC 0 Lun 0.
Setting device offline: FC 0 Lun 1.
Setting device offline: FC 0 Lun 2.
Setting device offline: FC 0 Lun 7.
Setting device offline: FC 1 Lun 0.
Setting device offline: FC 1 Lun 1.
Setting device offline: FC 1 Lun 2.
Setting device offline: FC 2 Lun 0.

```

```

Setting device offline: FC 2 Lun 1.
Setting device offline: FC 2 Lun 2.
Scanning SCSI bus 0
Scanning SCSI bus 1
Scanning SCSI bus 2
Scanning SCSI bus 3
SCSI bus 1 scan complete.
SCSI bus 2 scan complete.
SCSI bus 3 scan complete.
SCSI bus 0 scan complete.

```

```

Ready.
RouteDisplay online
11
;fp fl sb st sl On/Offline
0 0 0 0 0 Online
0 1 0 2 0 Online
0 2 0 3 0 Online
3 xx xx xx 4500
0 xx xx xx 4500
2 0 2 2 0 Online
2 1 2 3 0 Online
2 2 xx xx xx 4500
xx xx 0 7 0 Reserved
xx xx 1 7 0 Reserved
xx xx 2 7 0 Reserved
xx xx 3 7 0 Reserved

```

Appendix B Standards and compliances

The equipment described in this manual generates and uses radio frequency energy. If this equipment is not used in strict accordance with the manufacturer's instruction, it can and may cause interference with radio and television reception. See the Technical Specification sheet for a particular ATTO FibreBridge™ for a full list of certifications for that model.

FCC Standards: Radio and Television Interference

WARNING This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to Subpart J of Part 15 of FCC rules, which are designed to provide a reasonable protection against such interference when operating in a commercial environment. Operation of this equipment in a residential area is likely to cause interference, in which case the user, at his own expense, will be required to take whatever measures may be required to correct the interference.

If this equipment does cause interference to radio and television reception, which can be determined by turning the equipment off and on, try to correct the interference by one or more of the following measures:

- Move the receiving antenna.
- Relocate the bridge with respect to the receiver, or move the bridge away from the receiver.
- Plug the computer into a different outlet so the computer and receiver are on different branch circuits.
- If necessary, consult an ATTO authorized dealer, ATTO Technical Support Staff, or an experienced radio/television technician for additional suggestions.

The booklet *How to Identify and Resolve Radio/TV Interference Problems* prepared by the Federal Communications Commission is a helpful guide. It is available from the US Government printing office, Washington, DC 20402, Stock No. 004-000-00345-4.

Further results of FCC Testing

“In certain instances, extraordinary variances in the AC power supplied to this unit will require the operating system's normal error recovery procedure to retry the current SCSI command. In this case, the unit can fully recover with no loss of data, and without user intervention. Note that other exceptional conditions in addition to variances in the AC power, such as improper cabling or unrecognized commands, may also trigger these normal error recovery procedures.”

Canadian Standards

This Class A digital apparatus meets all requirements of the Canadian Interference-Causing Regulations.

Cet appareil numérique de la classe A respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.

European Standards

Declaration of Conformity

This following statement applies to the ATTO FibreBridge.

This device has been tested in the basic operating configuration and found to be compliant with the following European Union standards:

Application of Council Directive: 89/336/EEC

Standard(s) to which conformity is declared: EN55022, EN50082-1

This Declaration will only be valid when this product is used in conjunction with other CE approved devices and when the entire system is tested to the applicable CE standards and found to be compliant.

Appendix C Fibre Channel Accessories

The following Fibre Channel accessories are available through ATTO Technology. Contact an ATTO Technology authorized sales representative to order.

Embedded

FibreBridge 1180

FCBR-1180-ELC Fibre Channel to LVD Ultra2 SCSI Bridge Embedded Board with Copper DB9
FCBR-1180-ELS Fibre Channel to LVD Ultra2 SCSI Bridge Embedded Board with Optical SC

FibreBridge 1190

FCBR-1190-ELC Fibre Channel to LVD Ultra2 SCSI Bridge Embedded Board with Copper DB9
FCBR-1190-ELS Fibre Channel to LVD Ultra2 SCSI Bridge Embedded Board with Optical SC

FibreBridge 2300

FCBR-2300-EL0 2-Gig Fibre Channel to HVD Ultra SCSI Bridge Embedded Board

FibreBridge 4500

FCBR-4500-CH0 Fibre Channel to HVD Ultra SCSI Bridge CPCI Board
FCBR-4500-CL0 Fibre Channel to LVD Ultra2 SCSI Bridge CPCI Board

Desktop/Rackmount

FibreBridge 2200

FCBR-2200-DH0..... Fibre Channel to HVD Ultra SCSI Bridge Desktop or Rackmount
FCBR-2200-DL0..... Fibre Channel to LVD Ultra2 SCSI Bridge Desktop or Rackmount

FibreBridge 2300

FCBR-2300-DL0 2-Gig Fibre Channel to HVD Ultra SCSI Bridge Desktop or Rackmount

FibreBridge 4500

FCBR-4500-DH0 Fibre Channel to HVD Ultra SCSI Bridge Desktop or Rackmount
FCBR-4500-DL0 Fibre Channel to LVD Ultra2 SCSI Bridge Desktop or Rackmount

ATTO FC Rack System (build to order)

FC Rack Enclosures with Power Supplies

FCRS-BAS1-000..... Rack System with Single Power Supply
FCRS-BAS2-000..... Rack System with Redundant Power Supplies

FibreBridge 2100

FCBR-DU08-000..... ATTO FibreBridge 2100R HVD Standard
FCBR-DU64-000..... ATTO FibreBridge 2100R HVD Enhanced
FCBR-SU08-000..... ATTO FibreBridge 2100R Single-Ended Standard
FCBR-SU64-000..... ATTO FibreBridge 2100R Single-Ended Enhanced

FibreBridge 3200

FCBR-3200-RH0..... ATTO FibreBridge 3200R HVD
FCBR-3200-RL0..... ATTO FibreBridge 3200R LVD

FibreBridge 3300

FCBR-3300-000 2-Gig Fibre Channel to HVD Ultra SCSI Bridge

Field Replacement Units (FRU)

PWRA-0000-FRU	Power Module for ATTO FC Rack System
FCBR-DU08-FRU	ATTO FibreBridge 2100R HVD Standard Replacement Unit
FCBR-DU64-FRU	ATTO FibreBridge 2100R HVD Enhanced Replacement Unit
FCBR-SU08-FRU	ATTO FibreBridge 2100R Single-Ended Standard Replacement Unit
FCBR-SU64-FRU...	ATTO FibreBridge 2100R Single-Ended Enhanced Replacement Unit
FCBR-3200-RHF...	ATTO FibreBridge 3200R HVD Replacement Unit
FCBR-3200-RLF	ATTO FibreBridge 3200R LVD Replacement Unit
FCBR-3300-FRU	2-Gig Fibre Channel to HVD Ultra SCSI Bridge Replacement Unit

MIAs

ADAP-MIAS-BLK	MIA Adapter-Short Wave
---------------	------------------------

GBICS

GBIC-DB90-000	GBIC – DB9 Active Copper Interface
GBIC-HSDC-000	GBIC – HSSDC Active Copper Interface
GBIC-SWFO-000	GBIC – Short Wave Optical Duplex SC Interface

Cables/Copper

CBL-FCCU-003	DB9 Copper Fibre Channel Cable (Unequalized) – 3m.
CBL-FCCU-010	DB9 Copper Fibre Channel Cable (Unequalized) – 10m.
CBL-FCCE-020	DB9 Copper Fibre Channel Cable (Equalized) – 20m.
CBL-HSDB-003	HSSDC to DB9 Copper Fibre Channel Cable (Unequalized) – 3m.
CBL-HSDB-010	HSSDC to DB9 Copper Fibre Channel Cable (Unequalized) – 10m.
CBL-HSHS-003	HSSDC to HSSDC Copper Fibre Channel Cable (Unequalized) – 3m.
CBL-HSHS-010	HSSDC to HSSDC Copper Fibre Channel Cable (Unequalized) – 10m.

Cables/Optical

CBL-FCFI-005	5 Meter Cable-Duplex 50 Micron Multi-mode FC/Optical
CBL-FCFI-010	10 Meter Cable-Duplex 50 Micron Multi-mode FC/Optical
CBL-FCFI-030	30 Meter Cable- Duplex 50 Micron Multi-mode FC/Optical

Cables/FibreChain

CBL-FCFC-001	FibreChain 24" Cable
--------------	----------------------

Cables/SCSI

CBL-FP68-C3	68-pin "P" / 50-pin Centronics – 1m
CBL-FP68-C6	68-pin "P" / 50-pin Centronics – 2m
CBL-FP68-C25	68-pin "P" / 50-pin Centronics – 8m
CBL-FP68-C79	68-pin "P" / 50-pin Centronics – 24m
CBL-F68E-00X	68-pin "P" / 68-pin fine pitch "P" – 1ft
CBL-U68E-681	68-pin "P" / 68-pin fine pitch "P" – 1m
CBL-F68E-686	68-pin "P" / 68-pin fine pitch "P" – 2m
CBL-F68E-003	68-pin "P" / 68-pin fine pitch "P" – 3m
CBL-F68E-010	68-pin "P" / 68-pin fine pitch "P" – 10m
CBL-F68E-025	68-pin "P" / 68-pin fine pitch "P" – 25m
CBL-F68E-68X	68-pin "P" / 68-pin fine pitch "P" – 16m.
CBL-V68E-48	68-pin offset VHDCI to 68-pin VHDCI

Appendix D How to Contact ATTO Technology, Inc.

Customer service, sales information and technical support are available by phone Monday through Friday, Eastern Standard Time 8:00 a.m. to 8:00 p.m., or by fax and web site 24-hours a day.

ATTO Technology, Inc.
155 CrossPoint Parkway
Amherst, New York 14068
(716) 691-1999 • voice
(716) 691-9353 • fax
<http://www.attotech.com>

ATTO Technology can also be reached via e-mail at the following addresses:

Sales Support: sls@attotech.com
Technical Support: techsupp@attotech.com