




The Power Behind the Storage

ATTO's XstreamCORE™ FC 7550 Storage Controller

Create a shared workflow using existing direct attached SAS RAID storage

Solution Benefits

- The ATTO XstreamCORE™ FC 7550 Storage Controller enables multiple hosts with Fibre Channel connectivity to share the same pool of block-based storage over long distances
- Convert direct-attached SAS RAID, JBOD or JBOF to shared storage for collaborative workflows
- Aggregate performance across multiple storage arrays to meet the editing demands of 4K and 8K (compressed) projects

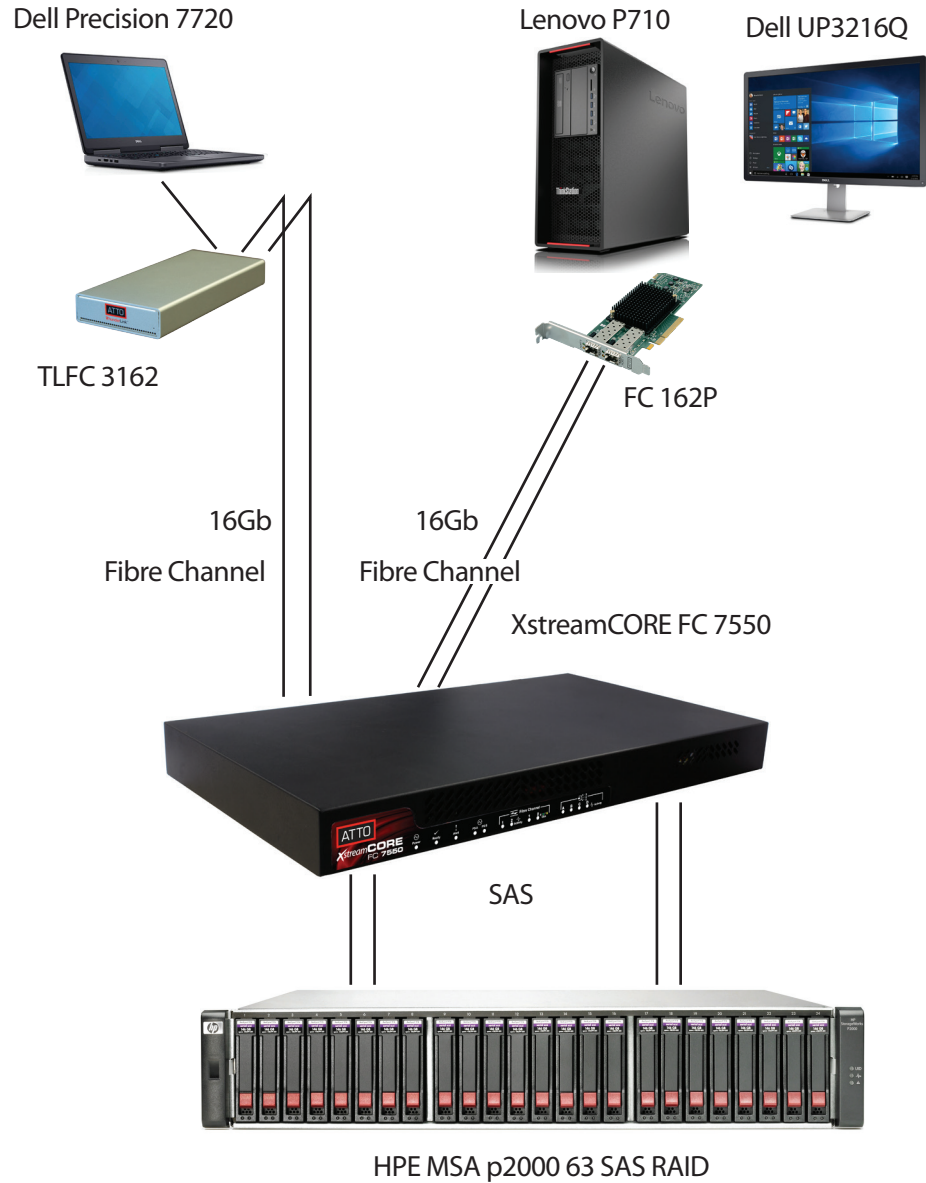

Whatever your workflow, ATTO powers storage connectivity for 4K, 8K and beyond | www.atto.com/tradeshaw/NAB | +1.716.691.1999

ATTO XstreamCORE™ Fibre Channel Storage Controllers

Product Features	7500	7550	7600	8200
Part Number	XCFC-7500-002	XCFC-7550-004	XCFC-7600-002	XCET-8200-002
Max Sustained Transfer Rate	3200 MB/s	6000 MB/s	6000 MB/s	6000 MB/s
4K IOPS	750,000	1,500,000	1,500,000	1,500,000
Input Connectors	(2) 16Gb Fibre Channel SFP+	(4) 16Gb Fibre Channel SFP+	(2) 32Gb Fibre Channel SFP+	(2) 40Gb Ethernet QSFP+
Output Connectors	(4) 12Gb HD Mini SAS (x4) SFF 8644	(4) 12Gb HD Mini SAS (x4) SFF 8644	(4) 12Gb HD Mini SAS (x4) SFF 8644	(4) 12Gb HD Mini SAS (x4) SFF 8644
Management Ports	RS-232/RJ45	RS-232/RJ45	RS-232/RJ45	RS-232/RJ45
Ethernet Management Protocols	IPv4, IPv6	IPv4, IPv6	IPv4, IPv6	IPv4, IPv6
xCORE Data Acceleration	Yes	Yes	Yes	Yes
eCORE Control Engine	Yes	Yes	Yes	Yes
Data Mover	Yes	Yes	Yes	Yes
Devices supported	Up to 240 (960 OEM)	Up to 240 (960 OEM)	Up to 240 (960 OEM)	Up to 240 (960 OEM)
Active initiator Support	64	64	64	Up to 1024
Event Log Protection	NVRAM	NVRAM	NVRAM	NVRAM
Expander/Port Multiplier support	Yes	Yes	Yes	Yes
Form Factor	1U Rackmount	1U Rackmount	1U Rackmount	1U Rackmount
Power Supplies	2 Hot Swap	2 Hot Swap	2 Hot Swap	2 Hot Swap
Disk Support	Yes	Yes	Yes	Yes
SSD Support	Yes	Yes	Yes	Yes
Warranty	2 year	2 year	2 year	2 year